


FLB141 LED Wall bracket - Symmetric

Projectors

we-ef

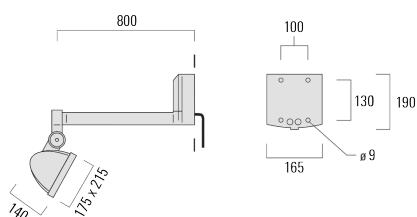

Description

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Knuckle permits 350° horizontal and 180° vertical aiming of optics.

Projectors

Specifications

Material description


Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

Electrical description



Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---

Additional information

Options

Light distribution	Colour temperature	Nominal Watt
 symmetric, wide beam [B]	 3000 K	0 W
 symmetric, medium beam [M]	 4000 K	
 symmetric, very narrow beam [EE]		

Configurations


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M] 	161-5880	LED-6/18W / 1050 mA - 3000 K	2167.2	21 W	80	6.3
	161-5881	LED-6/26W / 1400 mA - 3000 K	2772	27 W	80	6.3
	161-5882	LED-6/18W / 1050 mA - 4000 K	2268	21 W	80	6.3
	161-5883	LED-6/26W / 1400 mA - 4000 K	2898	27 W	80	6.3
symmetric, very narrow beam [EE] 	161-5884	LED-6/18W / 1050 mA - 3000 K	2165.6	21 W	80	6.3
	161-5885	LED-6/26W / 1400 mA - 3000 K	2770	27 W	80	6.3
	161-5886	LED-6/18W / 1050 mA - 4000 K	2266.4	21 W	80	6.3
	161-5887	LED-6/26W / 1400 mA - 4000 K	2895.9	27 W	80	6.3
symmetric, wide beam [B] 	161-5876	LED-6/18W / 1050 mA - 3000 K	2018.8	21 W	80	6.3
	161-5877	LED-6/26W / 1400 mA - 3000 K	2582.2	27 W	80	6.3
	161-5878	LED-6/18W / 1050 mA - 4000 K	2112.7	21 W	80	6.3
	161-5879	LED-6/26W / 1400 mA - 4000 K	2699.6	27 W	80	6.3

Projectors

Optical Accessories


Wire guard

Description	Part ID	C1	H1
Wire guard EG	161-9118	181	153



Barn doors


Description	Part ID	A	H1
Barn doors ED	161-9119	245	132



Projectors


Glare shield

Description	Part ID	A	H1
Glare shield ES	161-9121	165	132



Snoot


Description	Part ID	A	H1
Snoot ET	161-9122	135	155



Projectors


Honeycomb louvre

Description	Part ID	C1
Honeycomb louvre IW	146-0625	110



Flood lens


Description	Part ID	Additional information
Flood lens IO-360	161-5990	Broadens light distribution in all planes. 'Softens' fringe of beam. Suitable for luminaires with [M] and [EE] distributions. Internal component; factory installed.



Projectors


Linear spread lens

Description	Part ID	Additional information
Linear spread lens IO-180	161-5989	Broadens light distribution in one plane only. Suitable for luminaires with [M] and [EE] distributions. Internal component; factory installed.



Wallwash lens

Description	Part ID
Wallwash lens IO-20	161-5988



Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

Projectors

DALI interface

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!	90