


FLC121 LED - Ceon
Floodlights

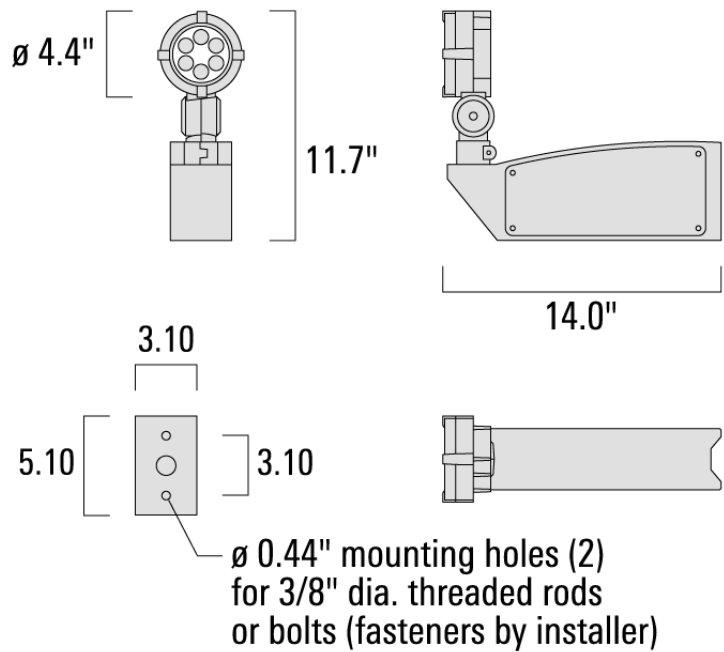

Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Knuckle permits 350° horizontal and 90° vertical aiming of optics. Suitable for pole or surface mount.

Specify product with 7 Digit product code – Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Floodlights

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div> <div></div> <div>RAL9004 Black</div> </div> <div> <div></div> <div>RAL9007 Grey Metallic</div> </div> <div> <div></div> <div>RAL9016 White</div> </div> <div> <div></div> <div>RAL8019 Dark Bronze</div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage
Driver / Ballast	Remote EC electronic converter (sold separately)

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50,000 h Ta 25°
Other Color	2700K, 3500K, 5000K and True Amber available on request.
Temperatures	

FLC121 LED - Ceon

Floodlights



Options

Light distribution



symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, very narrow beam [VN]



symmetric, very narrow beam, 'sharp cut-off' [VNS]



wallwash [A20]



linear spread, very narrow beam [VN]



linear spread, very narrow beam, 'sharp cut-off'

Color temperature



3000 K



4000 K







Nominal Watt

16 W

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 08/14/2025

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
linear spread, very narrow beam [VN] 	145-6502+145-0050	LED-6/12W / 700 mA - 3000 K	1386.3	14.5 W	80	15.00
	145-6503+145-0050	LED-6/12W / 700 mA - 4000 K	1481.9	14.5 W	80	15.00
linear spread, very narrow beam, 'sharp cut-off' 	145-6500+145-0050	LED-6/12W / 700 mA - 3000 K	1526.2	14.5 W	80	15.00
	145-6501+145-0050	LED-6/12W / 700 mA - 4000 K	1631.5	14.5 W	80	15.00
symmetric, medium beam [M] 	145-6504	LED-6/12W / 700 mA - 3000 K	1511.8	14.5 W	80	15.00
	145-6505	LED-6/12W / 700 mA - 4000 K	1616.1	14.5 W	80	15.00
symmetric, very narrow beam [VN] 	145-6502	LED-6/12W / 700 mA - 3000 K	1496.5	14.5 W	80	15.00
	145-6503	LED-6/12W / 700 mA - 4000 K	1599.7	14.5 W	80	15.00
symmetric, very narrow beam, 'sharp cut-off' [VNS] 	145-6500	LED-6/12W / 700 mA - 3000 K	1610.7	14.5 W	80	15.00
	145-6501	LED-6/12W / 700 mA - 4000 K	1721.8	14.5 W	80	15.00
symmetric, wide beam [W] 	145-6506	LED-6/12W / 700 mA - 3000 K	1347.1	14.5 W	80	15.00
	145-6507	LED-6/12W / 700 mA - 4000 K	1440	14.5 W	80	15.00
wallwash [A20]	145-6504+145-0145	LED-6/12W / 700 mA - 3000 K	1213	14.5 W	80	15.00
	145-6505+145-0145	LED-6/12W / 700 mA - 4000 K	1296.6	14.5 W	80	15.00

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/14/2025

FLC121 LED - Ceon

Floodlights




Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)

Optical Accessories


Snoot

Description	Part ID	A	C1
Snoot ET	145-0030	2.36"	4.72"




Linear spread lens

Description	Part ID	C1
IO-180-FLC121-LED	145-0050	3.19"




Softening Lens

Description	Part ID	C1
IO-360-FLC121-LED	145-0142	3.20



Wallwash lens

Description	Part ID	C1
IO-20-WW-FLC121-LED	145-0145	3.19"



Glare shield

Description	Part ID	A	C1
Glare shield ES	145-9192	4.02	4.69

