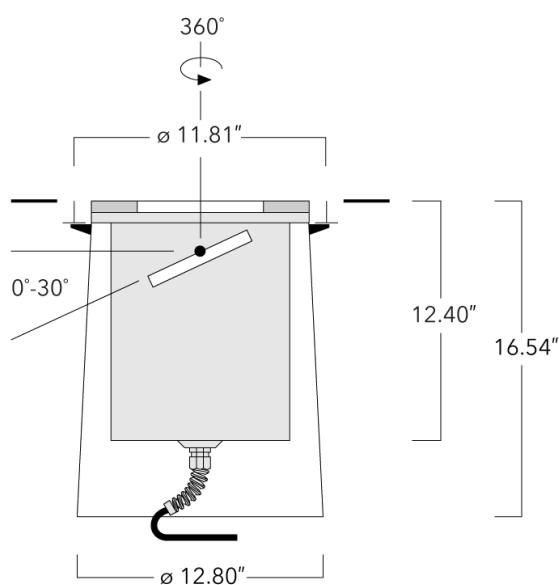


Inground Luminaires

**Description**

Tunable White.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Optional with Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10) available on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Cable gland with spiral cable bending protection. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver, thermally separated. OLC® One LED Concept. Factory-installed LED circuit board. Tunable White technology. DMX Controlled. Gimbal mounted, 360° rotatable and 30° tiltable.

The concrete-pour installation blockout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Inground Luminaires

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Inground Luminaires**Specifications****Material description**

Body	Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.
Lens	5/8" thick clear tempered glass lens. Max. load 5000kg/11,000 lbs.
Colors	 Stainless Steel
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK10+

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. DMX controlled, controller to be ordered separately.
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

Additional information

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Inground Luminaires**Options****Light distribution****Color temperature****Nominal Watt**

symmetric, wide beam [W]



symmetric, medium beam [M]






wallwash

2200-6000K

29 W

Inground Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M] 	185-3398	LED-24/30W / 225 mA - 2200-6000 K	2975	34 W	80	29.90
symmetric, wide beam [W] 	185-3397	LED-24/30W / 225 mA - 2200-6000 K	2846.8	34 W	80	29.90
wallwash 	185-3400	LED-24/30W / 225 mA - 2200-6000 K	2717.5	34 W	80	29.90

Inground Luminaires**Electrical Accessories****Sealable junction box**

Description	Part ID	C1	M1	M2
Sealable junction box SJB 130	185-1624	5.75	\varnothing 0.39	\varnothing 0.47 - 0.75

