

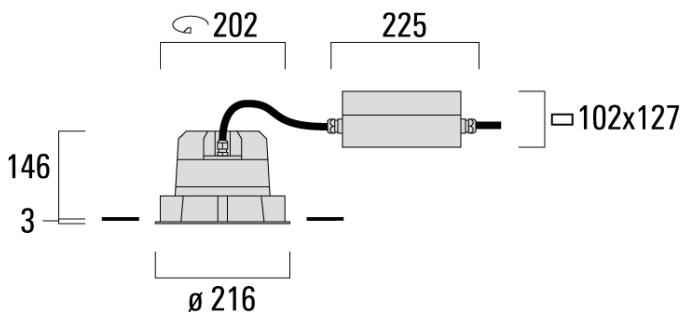


### Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG\_R\_ Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral EC electronic converter in thermally separated compartment. Darklight anodised aluminium reflector for superior illumination and glare control. Factory-installed LED circuit board.





The luminaire is factory- sealed and does not need to be opened during the installation. A pre-installation blackout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

A maximum of one internal optical accessory.



**Ceiling luminaires****Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

---

**Electrical description**

---

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	> 0.9

---

**Additional information**

---

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------

---

# DOC140-FT LED

## Ceiling luminaires

### Options

#### Light distribution



symmetric, wide beam [B]



symmetric, medium beam [M]



symmetric, narrow beam [E]

#### Colour temperature



3000 K



4000 K






2700 K

#### Nominal Watt

48 W

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M] 	134-1800	LED-FT-24W / 700 mA - 3000 K	2333.7	27 W	80	2.8
	134-1801	LED-FT-24W / 700 mA - 4000 K	2435.9	27 W	80	2.8
	134-1806	LED-FT-37W / 1050 mA - 3000 K	3430.6	42 W	80	2.8
	134-1807	LED-FT-37W / 1050 mA - 4000 K	3578.5	42 W	80	2.8
	134-1927	LED-FT-24W / 700 mA - 2700 K	2177.7	27 W	80	2.8
	134-1928	LED-FT-37W / 1050 mA - 2700 K	3296.2	42 W	80	2.8
symmetric, narrow beam [E] 	134-1802	LED-FT-24W / 700 mA - 3000 K	1290.2	27 W	80	2.8
	134-1803	LED-FT-24W / 700 mA - 4000 K	1346.7	27 W	80	2.8
	134-1808	LED-FT-37W / 1050 mA - 3000 K	1896.6	42 W	80	2.8
	134-1809	LED-FT-37W / 1050 mA - 4000 K	1978.4	42 W	80	2.8
	134-1929	LED-FT-24W / 700 mA - 2700 K	1204	27 W	80	2.8
	134-1930	LED-FT-37W / 1050 mA - 2700 K	1822.3	42 W	80	2.8
symmetric, wide beam [B] 	134-1798	LED-FT-24W / 700 mA - 3000 K	2292.2	27 W	80	2.8
	134-1799	LED-FT-24W / 700 mA - 4000 K	2392.6	27 W	80	2.8
	134-1804	LED-FT-37W / 1050 mA - 3000 K	3369.7	42 W	80	2.8
	134-1805	LED-FT-37W / 1050 mA - 4000 K	3514.9	42 W	80	2.8
	134-1925	LED-FT-24W / 700 mA - 2700 K	2139	27 W	80	2.8
	134-1926	LED-FT-37W / 1050 mA - 2700 K	3237.6	42 W	80	2.8

**Control**

**DALI interface**

---

Description	Part ID	C
DALI interface	430-0013	90

---


### Optical Accessories

#### Linear spread lens

---

Description	Part ID	C1
IO-180-DOC140-LED-FT	134-1816	171

---




---

#### Surface wash lens

---

Description	Part ID	C1
IO-360-DOC140-LED-FT	134-1818	171

---




# DOC140-FT LED

## Ceiling luminaires

**we-ef**

### Wallwash lens

Description	Part ID	C1
IO-20-WW-DOC140-LED-FT	134-1817	171



C1

#### WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 24/11/2024