


**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG\_R\_ Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral EC electronic converter in thermally separated compartment. Darklight anodised aluminium reflector for superior illumination and glare control. Factory-installed LED circuit board. Tunable White Technology. DALI Interface.

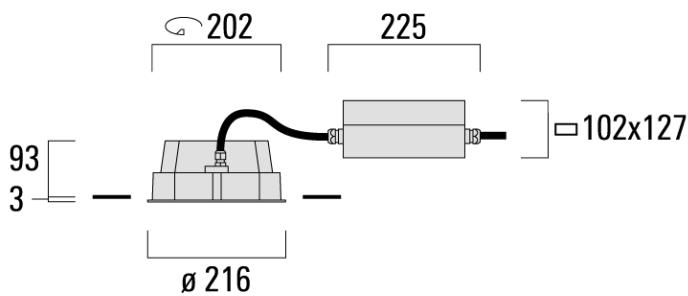

The luminaire is factory-sealed and does not need to be opened during the installation. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

A maximum of one internal optical accessory.

**Ceiling luminaires****Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

**Electrical description**

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	> 0.9

**Additional information**

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------

**Options****Light distribution**

symmetric, wide beam [B]

2700-6000K

**Nominal Watt**

0 W

24 W






symmetric, medium beam [M]




symmetric, narrow beam [E]

**Configurations**


Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
symmetric, medium beam [M] 	134-1812	LED-FT-24W / 700mA - 2700-6000 K	1826.2	27 W	80	2.80
symmetric, narrow beam [E] 	134-1814	LED-FT-24W / 700mA - 2700-6000 K	946.5	27 W	80	2.80
symmetric, wide beam [B] 	134-1810	LED-FT-24W / 700mA - 2700-6000 K	1856.5	27 W	80	2.80

**Ceiling luminaires****Mounting Accessories****Installation breakout, proud**

Description	Part ID	A	B	C1	D1
BD014-I	134-1763	443	324	192	216

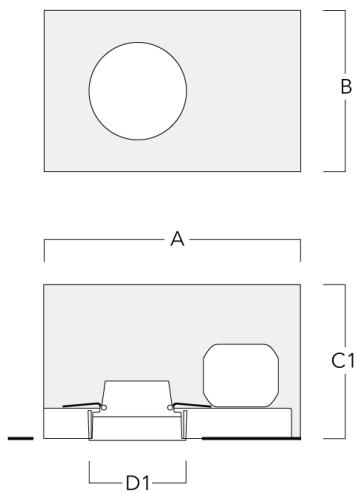
**Installation breakout, flush with shadow line**

Description	Part ID	A	B	C1	D1	D2
BD014-III	134-1764	443	324	192	216	267

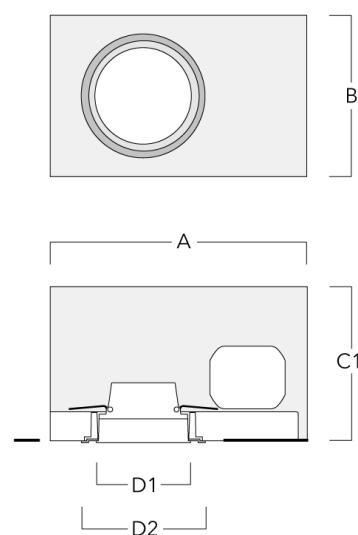

**Optical Accessories****Linear spread lens**


Description	Part ID	C1
IO-180-DOC140-LED-FT	134-1816	171



C1

**Surface wash lens**


Description	Part ID	C1
IO-360-DOC140-LED-FT	134-1818	171



C1

**Wallwash lens**

Description	Part ID	C1
IO-20-WW-DOC140-LED-FT	134-1817	171



— C1 —