


Ceiling Luminaires**Description**

DOC120-FT LED for remodel projects. For new construction, see DOC120-FT LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver, thermally separated. Darklight anodized aluminum reflector for superior illumination and glare control. Factory installed LED circuit board. DMX interface.

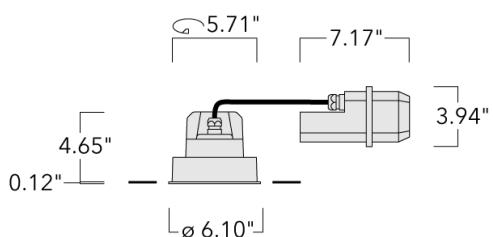

A maximum of one internal optical accessory, to be specified at time of ordering.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

Ceiling Luminaires**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Power factor	> 0.9

Additional information


Lifetime	Ta=25°/40° L70B50 > 50000h
Listings	Contact WE-EF USA for ETL/UL certification status.

Ceiling Luminaires**Options****Light distribution**

symmetric, wide beam [W]



symmetric, medium beam [M]



symmetric, narrow beam [E]

Color temperature

3000 K

24 W

0 W






4000 K



2700 K


Ceiling Luminaires

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	Weight (lb)
symmetric, medium beam [M]	134-1857	LED-FT-17W (3000K)	1757.2	20 W	80	4.96
	134-1858	LED-FT-17W (4000K)	1831.6	20 W	80	4.96
	134-1863	LED-FT-24W (3000K)	2415.5	27 W	80	4.96
	134-1864	LED-FT-24W (4000K)	2518.5	27 W	80	4.96
	134-1921	LED-FT-17W (2700K)	1680	20 W	80	4.96
	134-1922	LED-FT-24W (2700K)	2318.2	27 W	80	4.96
symmetric, narrow beam [E]	134-1859	LED-FT-17W (3000K)	824.1	20 W	80	4.96
	134-1860	LED-FT-17W (4000K)	859	20 W	80	4.96
	134-1865	LED-FT-24W (3000K)	1132.9	27 W	80	4.96
	134-1866	LED-FT-24W (4000K)	1181.2	27 W	80	4.96
	134-1923	LED-FT-17W (2700K)	787.9	20 W	80	4.96
	134-1924	LED-FT-24W (2700K)	1087.2	27 W	80	4.96
symmetric, wide beam [W]	134-1855	LED-FT-17W (3000K)	1743.3	20 W	80	4.96
	134-1856	LED-FT-17W (4000K)	1817.1	20 W	80	4.96
	134-1861	LED-FT-24W (3000K)	2396.3	27 W	80	4.96
	134-1862	LED-FT-24W (4000K)	2498.6	27 W	80	4.96
	134-1919	LED-FT-17W (2700K)	1666.6	20 W	80	4.96
	134-1920	LED-FT-24W (2700K)	2299.8	27 W	80	4.96



Ceiling Luminaires**Mounting Accessories****Installation blockout**

Description	Part ID	A	B	C1	D1
BD012-I	134-1748	15.1	10.7	7.6	6.1

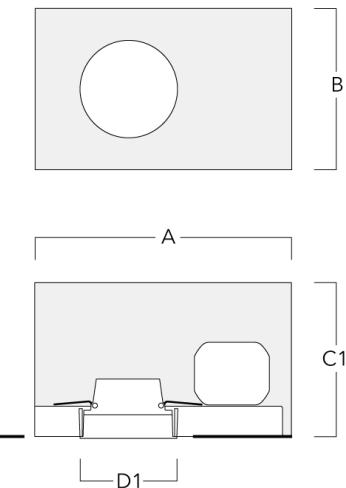


Ceiling Luminaires**Installation blockout, flush with shadow line**

Description	Part ID	A	B	C1	D1	D2
BD012-III	134-1749	15.08	9.13	7.55	6.1	7.8

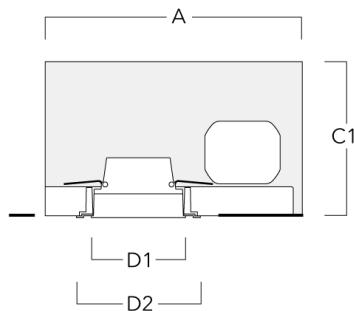


Ceiling Luminaires**Optical Accessories****Linear spread lens**

Description	Part ID	C1
IO-180-DOC120-LED-FT	134-1781	4.05



Ceiling Luminaires**Softening Lens**

Description	Part ID	C1
IO-360-DOC120-LED-FT	134-1782	4.05

**Wallwash lens**

Description	Part ID	C1
IO-20-WW-DOC120-LED-FT	134-1771	4.05

