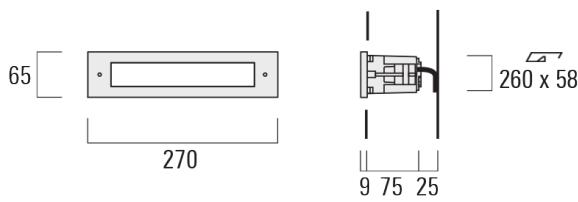



Wall luminaires recessed**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

Wall luminaires recessed**Specifications****Material description**

| | |
|----------------------|---|
| Body | Marine-grade, die-cast aluminium alloy with polished stainless steel frame |
| Lens | Polycarbonate |
| Colours |  Stainless Steel |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE+Primer |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral EC electronic converter |

Additional information

| | |
|----------|--|
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |
|----------|--|

Options**Light distribution**

diffused distribution

Colour temperature

3000 K


4000 K

2700 K

Nominal Watt

0 W

Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI | Weight (kg) |
|---|----------|--------------------------|--------------|-------------------|-----|-------------|
| diffused distribution  | 190-9044 | LED-5W / 250 mA - 3000 K | 78.6 | 5.6 W | 80 | 1.00 |
| | 190-9048 | LED-5W / 250 mA - 4000 K | 81.7 | 5.6 W | 80 | 1.00 |
| | 190-9052 | LED-5W / 250 mA - 2700 K | 75.4 | 5.6 W | 80 | 1.00 |