


STO134 LED Reduced Depth - Stainless Steel

Wall luminaires recessed

we-ef

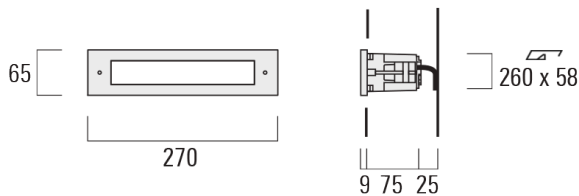

Description

IP66. IK07. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 14/08/2025


STO134 LED Reduced Depth - Stainless Steel

we-ef

Wall luminaires recessed

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy with polished stainless steel frame
Lens	Polycarbonate
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

Additional information

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>





Subject to technical changes and errors. - Generated on 14/08/2025

STO134 LED Reduced Depth - Stainless Steel



Wall luminaires recessed

Options


Light distribution	Colour temperature	Nominal Watt
 diffused distribution	 3000 K	0 W
	 4000 K	
	 2700 K	

STO134 LED Reduced Depth - Stainless Steel

we-ef

Wall luminaires recessed

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
diffused distribution 	190-9044	LED-5W / 250 mA - 3000 K	78.6	5.6 W	80	1.00
	190-9048	LED-5W / 250 mA - 4000 K	81.7	5.6 W	80	1.00
	190-9052	LED-5W / 250 mA - 2700 K	75.4	5.6 W	80	1.00

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 14/08/2025