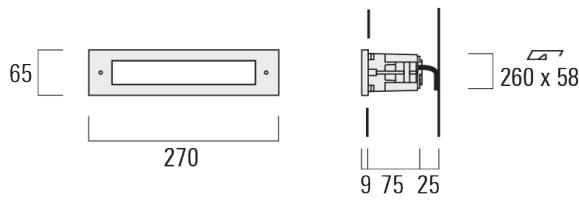


**Wall luminaires recessed****Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

**Wall luminaires recessed****Specifications****Material description**

---

Body	Marine-grade, die-cast aluminium alloy with polished stainless steel frame
Lens	Polycarbonate
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

---

**Electrical description**

---

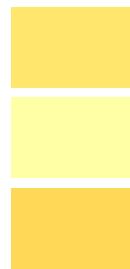
Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

---

**Additional information**

**Options****Light distribution**

+ diffused distribution

**Colour temperature**

3000 K


4000 K

2700 K

**Nominal Watt**

0 W

**Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
diffused distribution 	190-9044	LED-5W / 250 mA - 3000 K	78.6	5.6 W	80	1.00
	190-9048	LED-5W / 250 mA - 4000 K	81.7	5.6 W	80	1.00
	190-9052	LED-5W / 250 mA - 2700 K	75.4	5.6 W	80	1.00