

STL134 LED Shallow Depth

we-ef


Wall luminaires recessed



Description

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry. Second cable entry for through wiring available on request.

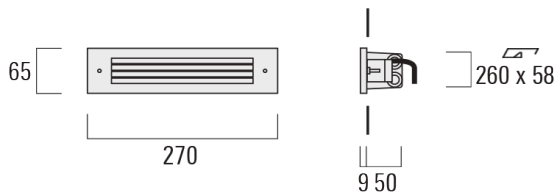

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

Additional information

STL134 LED Shallow Depth

Wall luminaires recessed

Options

Light distribution	Colour temperature	Nominal Watt
 shielded	 3000 K	0 W
	 4000 K	
	 2700 K	

STL134 LED Shallow Depth



Wall luminaires recessed

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
shielded 	190-9004	LED-6W / 350 mA - 3000 K	25.2	8 W	80	0.65
	190-9056	LED-6W / 350 mA - 4000 K	26.6	8 W	80	0.65
	190-9061	LED-6W / 350 mA - 2700 K	23.8	8 W	80	0.65