


PLS430 LED

Wall luminaires surface mounted

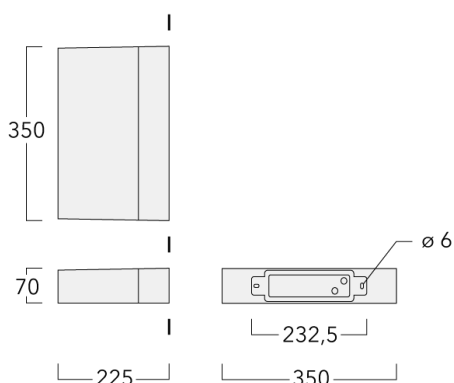

Description

IP66. Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Luminaire can be mounted for up or down lighting.

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>




Subject to technical changes and errors. - Generated on 23/11/2024

PLS430 LED

Wall luminaires surface mounted

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.

Additional information

Lifetime	Ta=40° L90B10 > 90000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

PLS430 LED

Wall luminaires surface mounted

Options


Light distribution



symmetric, medium beam [M]



symmetric, narrow beam [E]



asymmetric, side throw [S70]



asymmetric, forward throw [A60]



rectangular, side throw [R65]

Colour temperature



3000 K



4000 K







2700 K

Nominal Watt


0 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, forward throw [A60] 	131-9641	LED-12/24W / 700 mA - 2700 K	1880.5	27 W	80	5.20
	131-9642	LED-12/36W / 1050 mA - 2700 K	2696.1	41 W	80	5.20
	131-9643	LED-12/52W / 1400 mA - 2700 K	3419.5	55 W	80	5.20
	131-9665	LED-12/24W / 700 mA - 3000 K	2019.8	27 W	80	5.20
	131-9666	LED-12/24W / 700 mA - 4000 K	2159.1	27 W	80	5.20
	131-9667	LED-12/36W / 1050 mA - 3000 K	2827.6	41 W	80	5.20
	131-9668	LED-12/36W / 1050 mA - 4000 K	2959.2	41 W	80	5.20
	131-9669	LED-12/52W / 1400 mA - 3000 K	3616.7	55 W	80	5.20
	131-9670	LED-12/52W / 1400 mA - 4000 K	3781.1	55 W	80	5.20
asymmetric, side throw [S70] 	131-9635	LED-12/24W / 700 mA - 2700 K	1936.3	27 W	80	5.20
	131-9636	LED-12/36W / 1050 mA - 2700 K	2860.3	41 W	80	5.20
	131-9637	LED-12/52W / 1400 mA - 2700 K	3627.7	55 W	80	5.20
	131-9652	LED-12/24W / 700 mA - 3000 K	2079.8	27 W	80	5.20
	131-9654	LED-12/24W / 700 mA - 4000 K	2223.2	27 W	80	5.20
	131-9655	LED-12/36W / 1050 mA - 3000 K	2999.9	41 W	80	5.20
	131-9656	LED-12/36W / 1050 mA - 4000 K	3139.4	41 W	80	5.20
	131-9657	LED-12/52W / 1400 mA - 3000 K	3837	55 W	80	5.20
	131-9658	LED-12/52W / 1400 mA - 4000 K	4011.5	55 W	80	5.20
rectangular, side throw [R65] 	131-9638	LED-12/24W / 700 mA - 2700 K	1760.2	27 W	80	5.20
	131-9639	LED-12/36W / 1050 mA - 2700 K	2622	41 W	80	5.20
	131-9640	LED-12/52W / 1400 mA - 2700 K	3325.4	55 W	80	5.20
	131-9659	LED-12/24W / 700 mA - 3000 K	1890.6	27 W	80	5.20
	131-9660	LED-12/24W / 700 mA - 4000 K	2021	27 W	80	5.20
	131-9661	LED-12/36W / 1050 mA - 3000 K	2749.9	41 W	80	5.20
	131-9662	LED-12/36W / 1050 mA - 4000 K	2877.8	41 W	80	5.20
	131-9663	LED-12/52W / 1400 mA - 3000 K	3517.3	55 W	80	5.20
	131-9664	LED-12/52W / 1400 mA - 4000 K	3677.2	55 W	80	5.20
symmetric, medium beam [M] 	131-9644	LED-12/24W / 700 mA - 2700 K	2601.4	27 W	80	5.20
	131-9645	LED-12/36W / 1050 mA - 2700 K	3889.7	41 W	80	5.20
	131-9646	LED-12/52W / 1400 mA - 2700 K	4933.2	55 W	80	5.20
	131-9671	LED-12/24W / 700 mA - 3000 K	2794.1	27 W	80	5.20
	131-9672	LED-12/24W / 700 mA - 4000 K	2986.8	27 W	80	5.20
	131-9673	LED-12/36W / 1050 mA - 3000 K	4079.4	41 W	80	5.20
	131-9674	LED-12/36W / 1050 mA - 4000 K	4269.2	41 W	80	5.20
	131-9675	LED-12/52W / 1400 mA - 3000 K	5217.9	55 W	80	5.20

PLS430 LED

Wall luminaires surface mounted

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
 symmetric, narrow beam [E]	131-9676	LED-12/52W / 1400 mA - 4000 K	5455	55 W	80	5.20
	131-9647	LED-12/24W / 700 mA - 2700 K	2446.4	27 W	80	5.20
	131-9648	LED-12/36W / 1050 mA - 2700 K	3944.6	41 W	80	5.20
	131-9649	LED-12/52W / 1400 mA - 2700 K	5003	55 W	80	5.20
	131-9677	LED-12/24W / 700 mA - 3000 K	2627.6	27 W	80	5.20
	131-9678	LED-12/24W / 700 mA - 4000 K	2808.8	27 W	80	5.20
	131-9679	LED-12/36W / 1050 mA - 3000 K	4137.1	41 W	80	5.20
	131-9680	LED-12/36W / 1050 mA - 4000 K	4329.5	41 W	80	5.20
	131-9681	LED-12/52W / 1400 mA - 3000 K	5291.6	55 W	80	5.20
	131-9682	LED-12/52W / 1400 mA - 4000 K	5532.1	55 W	80	5.20

PLS430 LED

Wall luminaires surface mounted



Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

Wall luminaires surface mounted**DALI interface**

Description	Part ID	Additional information	C
DALI interface	430-0013	DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).	90

Dali 2.0


- Application controllers and Input devices defined
- Single-masters and multi-masters allowed
- Event priorities defined
- Separate addressing & grouping from control gear

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!

Optical Accessories


Colour correction filter

Description	Part ID
IF-3000K > 2400K	131-9685



Honeycomb louvre

Description	Part ID	C1	H1
Honeycomb louvre IW	131-9684	308	71

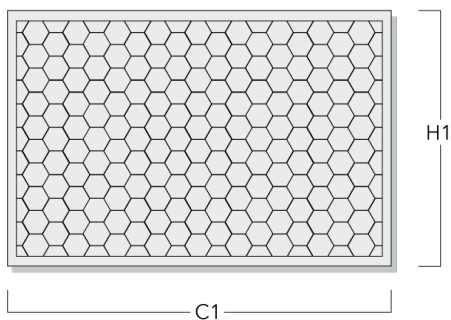

Wall luminaires surface mounted**Light shield**

Description	Part ID	Additional information
LS180-[A60]	003-4018	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [A60] lenses. Must be specified at time of ordering.
LS180	003-4019	Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit. Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering.

PLS430 LED

Wall luminaires surface mounted

Mounting Accessories

Bird deterrent

Description	Part ID
Bird deterrent BD	131-9688

