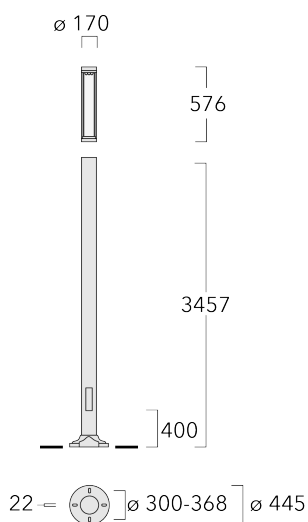


LTM440 LED

Light columns

we-ef



Description

IP66, Class I. IK09. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. CAD-optimised optics for superior illumination and glare control. Optional 2200 K version available. To be specified at time of ordering.

Service door with fused cable connecting box.

Supplied as a complete luminaire (luminaire head and standpipe). Please note: The standpipe height must be entered for the photometric calculation.

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>




Subject to technical changes and errors. - Generated on 23/11/2024

LTM440 LED

Light columns

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	PMMA
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK09
Corrosion resistance	5CE+Primer

Electrical description

Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

Additional information

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

LTM440 LED

Light columns

Options

Light distribution



asymmetric, side throw [S65]



rectangular, side throw [R65]

Colour temperature



3000 K



4000 K





2700 K

Nominal Watt

0 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (kg)
asymmetric, side throw [S65] 	115-1525	LED-9/18W / 700 mA - 3000 K	2320.1	20 W	80	25.00
	115-1526	LED-9/18W / 700 mA - 4000 K	2480.1	20 W	80	25.00
	115-1569	LED-9/27W / 1050 mA - 3000 K	3440.2	30 W	80	25.00
	115-1570	LED-9/27W / 1050 mA - 4000 K	3600.2	30 W	80	25.00
	115-1782	LED-9/18W / 700 mA - 2700 K	2160.1	20 W	80	25.00
	115-1783	LED-9/27W / 1050 mA - 2700 K	3280.1	30 W	80	25.00
rectangular, side throw [R65] 	115-1527	LED-9/18W / 700 mA - 3000 K	2448.9	20 W	80	25.00
	115-1528	LED-9/18W / 700 mA - 4000 K	2617.8	20 W	80	25.00
	115-1567	LED-9/27W / 1050 mA - 3000 K	3631.1	30 W	80	25.00
	115-1568	LED-9/27W / 1050 mA - 4000 K	3800	30 W	80	25.00
	115-1784	LED-9/18W / 700 mA - 2700 K	2280	20 W	80	25.00
	115-1785	LED-9/27W / 1050 mA - 2700 K	3462.2	30 W	80	25.00

Mounting Accessories

Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	T1	T2	Weight (kg)
Planted root ESV6 for fixing dimension \varnothing 244-293	300-0457-AP	305	270	106	140	606	506	16	200	50 x 100	18.10

