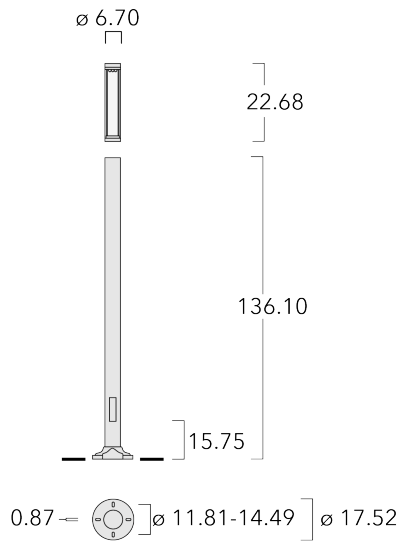


# LTM440 LED Light Columns

**we-ef**



## Description

IP66. Class I. IK09. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate outer lens. Service door with fused cable connecting box. CAD-optimized optics for superior illumination and glare control. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.





Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

## WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 11/23/2024

**Specifications****Material description**

---

Body	Luminaire head, base plate and base plate cover constructed in die cast aluminum
Lens	Clear Polycarbonate outer lens
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK09
Corrosion resistance	5CE

---

**Electrical description**

---

Power supply	Integral [ECG] LED driver in 120-277V
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9
Surge protection	In-line bracket 10kV Surge Protector

---

**Additional information**

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

---

# LTM440 LED

## Light Columns

### Options

#### Light distribution



[S65] Type III Medium



[R65] Type IV Medium

#### Color temperature



3000 K



4000 K



2700 K

#### Nominal Watt

0 W

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>



Subject to technical changes and errors. - Generated on 11/23/2024

# LTM440 LED

## Light Columns

**we-ef**

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
	115-1527	LED-9/18W / 700 mA - 3000 K	2448.9	20 W	80	55.10
	115-1528	LED-9/18W / 700 mA - 4000 K	2617.8	20 W	80	55.10
	115-1567	LED-9/27W / 1050 mA - 3000 K	3631.1	30 W	80	55.10
	115-1568	LED-9/27W / 1050 mA - 4000 K	3800	30 W	80	55.10
	115-1784	LED-9/18W / 700 mA - 2700 K	2280	20 W	80	55.10
	115-1785	LED-9/27W / 1050 mA - 2700 K	3462.2	30 W	80	55.10
	115-1525	LED-9/18W / 700 mA - 3000 K	2320.1	20 W	80	55.10
	115-1526	LED-9/18W / 700 mA - 4000 K	2480.1	20 W	80	55.10
	115-1569	LED-9/27W / 1050 mA - 3000 K	3440.2	30 W	80	55.10
	115-1570	LED-9/27W / 1050 mA - 4000 K	3600.2	30 W	80	55.10
	115-1782	LED-9/18W / 700 mA - 2700 K	2160.1	20 W	80	55.10
	115-1783	LED-9/27W / 1050 mA - 2700 K	3280.1	30 W	80	55.10

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 11/23/2024

**Mounting Accessories**

**Planted root**

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV10	300-0949	16.34	13.39	4.96	5.24	39.37	19.69	0.71	55.78

