

117-0268

CFY259 LED - 1085 mm

we-ef



Description

IP66, Class I. IK10. Marine-grade, all aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Diffused glass lens. Integral EC electronic converter in thermally-separated compartment. Factory installed LED circuit board. CAD-optimised indirect optics for superior illumination and glare control. Pre-wired post complete with cable connecting box and fuse for mains connection.

| | |
|---------------------------|--------------------------------------|
| Weight | 18.00 kg |
| Light distribution | asymmetric, forward-throw, two-sided |
| Light source | LED-2x6/24W / 700 mA - 4000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 12 |
| Rated input power | 27 W |
| Nominal Lumen (lm) | |
| LED Lumen | 310 |
| Total Lumen | 3720 |
| T _j | 85 |
| Rated lumens (lm) | |
| LED Lumen | 65.6 |
| Total Lumen | 787.4 |
| T _a | 25 |

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499



info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/10/2024

117-0268




CFY259 LED - 1085 mm

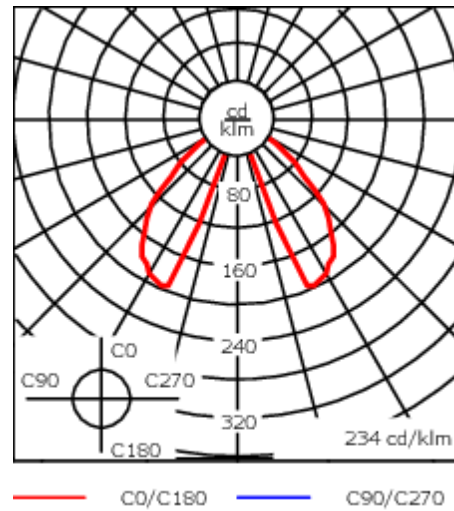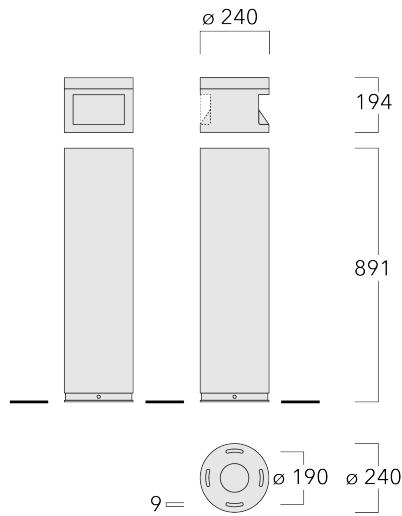we-ef



Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, all-aluminium construction |
| Lens | Diffused glass |
| Colours |  RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP66 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE+Primer |

Electrical description

| | |
|------------------|-------------------------------------|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | 10/10kV (SP10) available on request |

Additional information

| | |
|----------|--|
| Lifetime | Ta=40° L90B10 > 90000h |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/10/2024

117-0268


CFY259 LED - 1085 mm

we-ef


Control

Eco Step Dim® Motion

| Description | Part ID |
|---------------------------------------|----------|
| Eco Step Dim® Motion - Linked-Primary | 430-0030 |

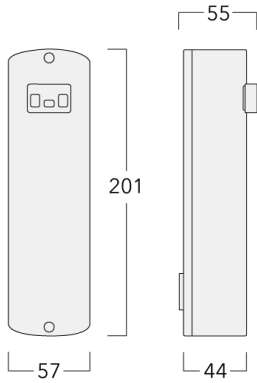

| | |
|---|----------|
| Eco Step Dim® Motion - Linked-Secondary | 430-0031 |
|---|----------|

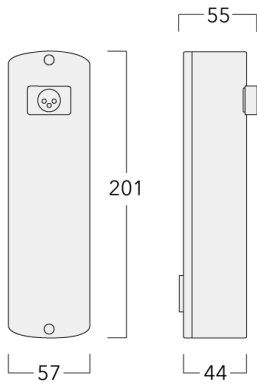

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>


Subject to technical changes and errors. - Generated on 23/10/2024

117-0268

CFY259 LED - 1085 mm

we-ef

| Description | Part ID |
|------------------------------------|----------|
| Eco Step Dim® Motion - Stand-Alone | 430-0037 |

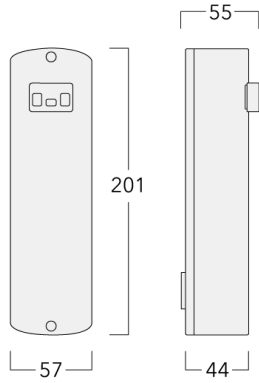

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/10/2024

117-0268

CFY259 LED - 1085 mm

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria

Phone: +61 3 8587 0444

Fax: +61 3 8587 0499

info.australia@we-ef.com

<https://we-ef.com/aus>

Subject to technical changes and errors.

Generated on 23/10/2024