we-ef

FLC230 LED COLOR CHANGER



Description

RGBW/RGBA Color Changer.

IP66. Class I. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands; one for power, one for DMX. CAD-optimized optics for superior illumination and glare control. Integral driver, thermally separated. OLC® One LED Concept. Factory-installed LED circuit board. DMX interface.

Color Boost technology: With Color Boost the targeted and selective control of individual channels or colors means that a higher power of the LEDs can be accessed than in total when all colors are simultaneously operated. The light output is thus maximized by targeted control of individual channels/colors.

For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1.5 + DMX".

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Weight	16.76 lb
Light distribution	linear spread, narrow beam [N]
Light source	LED-12/48W - RGBW/4K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	49 W
Nominal Lumen (lm)	
LED Lumen	385
Total Lumen	4620
Tj	85
Delivered lumens (lm)	
LED Lumen	270.4
Total Lumen	3244.5
Та	25


FLC230 LED COLOR CHANGER


we-ef

Example: XXX-XXXX-9004 (Black) + XXX-XXXX (Accessory 1)

we-ef

FLC230 LED COLOR CHANGER

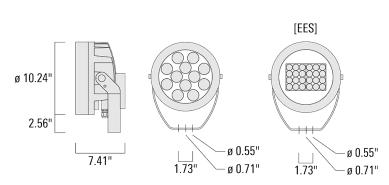



Specifications

Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors

RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK07

Corrosion resistance 5CE superior corrosion protection system

Windage 0.684



FLC230 LED COLOR CHANGER

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V.

Driver / Ballast Integral EC electronic converter with DMX Interface

Power factor > 0.9

Surge protection Integral 10kV Surge Protector

Additional information

Lifetime	$Ta=25^{\circ}/40^{\circ} L90B10 > 90000h$
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. Meets ANSI C136.31 - 3G Vibration

Rating for Bridge and Overpass Applications.


we-ef

FLC230 LED COLOR CHANGER


Mounting Accessories

Floodlight mounting bracket TA

Description	Part ID	Α	C1	D × L1	L	Weight (lb)	$D \times S$
TA1 Mounting bracket, single (Ø 4.25	147-0096		5.12	4.25 x 8	4.25	16.53	108 x 200
x 8)							




TA2 Mounting bracket, double (Ø	147-0097	5.12	4.25 x 8 4.25	16.53	108 x 200
4.25 x 8)					




we-ef

FLC230 LED COLOR CHANGER

Description	Part ID	А	C1	D × L1	L	Weight (lb)	D×S
TA2-L Mounting bracket, double (Ø	147-0148	±90°	16.54	4.25 x 8	4.25	44.53	108 x 200
4.25 x 8)							




TA2-L Mounting bracket, double (Ø 3	147-0105	±90° 16.54	3 x 8	2.99 35.49	76 x 200	
x 8)						




we-ef

FLC230 LED COLOR CHANGER

Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
TA3 Mounting bracket, triple (Ø 3.50	147-0025	±90°	25.59	3.50 x 8	3.5	39.46	89 x 200
x 8)							




TA3 Mounting bracket, triple (Ø 4.25	147-0098	±90°	25.59"	4.25 x 8	53.35 lbs	108 x 200
x 8)						







FLC230 LED COLOR CHANGER

Description	Part ID	Α	C1	D × L1	L	Weight (lb)	D×S
TA4 Mounting bracket, quad (Ø 3.50	147-0099	±90°	25.59	3.50 x 8		45.86 lbs	89 x 200
x 8)							






TA4 Mounting bracket, quad (Ø 4.25	147-0100	±90°	25.59	4.25 x 8	53.00	108 x 200
x 8)						






FLC230 LED COLOR CHANGER

Description	Part ID	Α	C1	D × L1	L	Weight (lb)	$D \times S$
TA2 Mounting bracket, double (Ø 3 x	147-0024		5.12	3 x 8	2.99	4.2 lbs	76 x 200
8)							



TA1 Mounting bracket, single (Ø 3 x	147-0023	5 12	3 x 8	2.99 4.19	76 x 200
on	147-0023	J. 12	3 X O	2.77 4.17	70 X 200







FLC230 LED COLOR CHANGER

Pole clamp TS

Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø	147-0526	4.0-4.50	3.53	102-114
4.0"-4.5")				




TS1-2/M12 Pole clamp, single (Ø	147-0544	114-133	3.75	114-133
4.5"-5.25")				




Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø	147-0543	3.0-3.50	3.31	76-89



TS2-2/M12 Pole clamp, double (Ø	147-0545	3.0"-3.5"	3.09 lbs	76-89
3"-3.5")				




Description	Part ID	D1	Weight (lb)	D
TS2-2/M16 Pole clamp, double (Ø	147-0546	4.50-5.25	3.53	114-133
4.5"-5.25")				



Planted root

Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.54







FLC230 LED COLOR CHANGER

Pole top caps KF

Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-60/M16 Spigot Cap (Ø 2.36")	310-9120	2.36	2.36 x 4	4.4 lbs	60 x 100




KF16-76/M16 Spigot Cap (Ø 3.0")	310-9121	3	3 x 4	1.10 lbs	76 x 100





FLC230 LED COLOR CHANGER

Description	Part ID	D1	D × L1	Weight (lb)	D
6-89/M16 Spigot Cap (Ø 3.5")	300-0734	3.50	3.5 x 3	1.10 lbs	89



KF16-108/M16 Spigot Cap (Ø 4.25") 300-0735 4.25 4.25 x 3 4.4 lbs 108







FLC230 LED COLOR CHANGER

Short post EM

Description	Part ID	D1	D2	H1	M1	Weight (lb)
EM1-M16 AL	270-0001	6.3"	5.12"	8"	0.35"	4.85 lbs



Surface Mount Canopy SMC







FLC230 LED COLOR CHANGER

Pole clamp PC


Description	Part ID	D1	Weight (lb)
PC2 76-89/60 Pole clamp, double (Ø	139-2703	3.0-3.50	2.20
3"-3.5")			



PC1 76-89/60 Pole clamp, single (Ø	139-2702	3.0-3.50	2.20
3"-3.5")			



Description	Part ID	D1	Weight (lb)
PC2 102-114/60 Pole clamp, double	139-2707	4.0-4.50	2.65
(Ø 4"-4.5")			




PC1 102-114/60 Pole clamp, single (Ø 4"-4,5")

139-2706


4.0-4.50

2.65





Description	Part ID	D1	Weight (lb)
PC2 114-133/60 Pole clamp, double	139-2709	4.5-5.25	3.10
(Ø 4.5"-5.25")			




PC1 114-133/60 Pole clamp, single (Ø 4.5"-5.25")


139-2708

4.5-5.25

3.10



Description	Part ID	D1	Weight (lb)
PC2 82-109/60 Pole clamp, double	139-2705	3.20-4.30	2.40
(Ø 3.25"-4.25")			




PC1 82-109/60 Pole camp, single (Ø

139-2704

3.20-4.30 2.40

3.25"-4.3")





FLC230 LED COLOR CHANGER

Optical Accessories

Glare shield

Description	Part ID	Α	C1
ES-FLC230-LED	139-1852	6.26	10.47



ES-FLC230-CC-LED	420 /070	/ 20	10.47
FX_FI(/ 3()_((_1 FI)	139-6970	679	111/1/
LJ-I LCZJU-CC-LLU	137-0770	U.Z /	10.47






FLC230 LED COLOR CHANGER

Snoot

Description	Part ID	Α	C1
ET-FLC230-LED	139-1853	6.3	10.47



ET-FLC230-CC-LED	139-6974	6.29	10.47



FLC230 LED COLOR CHANGER

Linear spread lens

Description	Part ID	C1
IO-180-FLC230-LED	139-1849	7.80



Softening Lens






FLC230 LED COLOR CHANGER

Wallwash lens

Description	Part ID	C1
IO-20-FLC230-LED	139-1848	7.83





FLC230 LED COLOR CHANGER

Control

DMX Controller

Description	Part ID
DMX Controller	400-0469

DMX Controller (smart)

Description	Part ID	Additional information
DMX Controller (smart)	400-0470	IP20. The Touch Panel is an untutive abd easy-to use keypad or one DMX universe. It can store up to
		36 scences; alternatively, via





FLC230 LED COLOR CHANGER

DMX Booster Box

Description	Part ID	
DMX Booster Box	400-0474	



DMX Termination Plug

Description	Part ID	
DMX Termination Plug	400-0475	



we-ef

FLC230 LED COLOR CHANGER

DMX Plug and Socket

Description	Part ID
DMX Plug and Socket	400-0479



DMX Combination Cable

Description	Part ID	
DMX Combination Cable	400-0480	





FLC230 LED COLOR CHANGER

DMX Wireless Repeater

Description	Part ID
DMX Wireless Repeater	400-0477



DMX Wireless Transceiver

Description	Part ID	
DMX Wireless Transceiver	400-0476	

