





### Description

IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. 1-10 V analogue dimming or DALI interface available on request.

Luminaire installation blackout and sealable junction box included in supply.

Weight	8.00 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-6/18W / 1050 mA - 3000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	21 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	430
Total Lumen	2580
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	360.4
Total Lumen	2162.6
T <sub>a</sub>	25

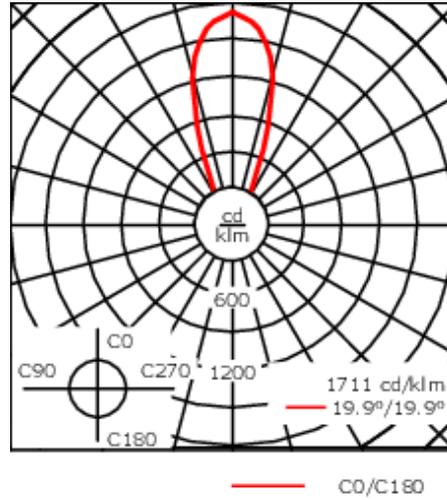

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP69
Impact resistance	IK10+

### Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

### Additional information

**Control**

**DALI interface**

---

Description	Part ID
DALI interface	430-0013

---

**1-10 V analogue dimming interface**

---

Description	Part ID
1-10 V analogue dimming interface	430-0011

---

## Mounting Accessories

### Installation cover

---

Description	Part ID	C1
Installation cover BE	185-0325	250


---



**Optical Accessories**

**Optical Adaptor**

Description	Part ID
Internal optical Adaptor IA	185-7420



**Linear louvre**

Description	Part ID	C1
Linear louvre IL	185-9677	81




**ETC330-GB LED**

---

**Linear spread lens**


Description	Part ID	C1
Linear spread lens IO-180	185-9678	98



---

**Flood lens**

Description	Part ID	C1
Flood lens IO-360	185-9679	98




**ETC330-GB LED**

---

**Colour filter**


Description	Part ID
Colour filter IF	on request



---

**Honeycomb louvre**

Description	Part ID	C1
Honeycomb Louvre IW	185-0143	81



**Colour correction filter**

---

Description	Part ID
IF-3000K > 2400K	145-9188

---

