we-et

### FLC220 LED



### **Description**

3G Vibration Certified.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland, second gland for through wiring on request. CAD-optimized optics for superior illumination and glare control. Integral driver, thermally separated. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Optional 2200 K version available. To be specified at time of ordering.

A maximum of one internal optical accessory.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)


+ XXX-XXXX (Accessory 1)

| Weight             | 9.50 lb                      |
|--------------------|------------------------------|
| Light distribution | symmetric, medium beam [M]   |
| Light source       | LED-6/18W / 1050 mA - 4000 K |
| CRI                | 80                           |
| Power supply       | electronic gear              |
| LEDs               | 6                            |
| Rated input power  | 21 W                         |
| Nominal Lumen (lm) |                              |
| LED Lumen          | 450                          |
| Total Lumen        | 2700                         |
| Tj                 | 85                           |
| Rated lumens (lm)  |                              |
| LED Lumen          | 396.6                        |
| Total Lumen        | 2379.6                       |
| Та                 | 25                           |
|                    |                              |

# FLC220 LED







# **Specifications**

# **Material description**

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors

RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

Windage 0.372

## **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast ECG in thermally-separated compartment

Surge protection Integral 10kV Surge Protector

## FLC220 LED



## **Additional information**

| Lifetime  | Ta=25°/40° L90B10 > 90000h  |
|-----------|---|
| Lead Time | This is a new product release and may have an extended lead time.   |
| Listings  | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. Meets ANSI C136.31 - 3G Vibration Rating for Bridge and Overpass Applications. |


### FLC220 LED



# **Mounting Accessories**

## **Short post EM**

| Description                     | Part ID  | D1  | D2   | H1    | M1    | Weight (lb) |
|---------------------------------|----------|-----|------|-------|-------|-------------|
| EM1-M16 AL - Single Cable Entry | 270-9038 | 6.3 | 5.12 | 7.87" | 0.35" | 4.85 lbs    |




# Floodlight mounting bracket TA


### FLC220 LED



| Description                          | Part ID  | А | C1   | D × L1   | L    | Weight (lb) | $D \times S$ |
|--------------------------------------|----------|---|------|----------|------|-------------|--------------|
| TA1 Mounting bracket, single (Ø 4.25 | 147-0096 |   | 5.12 | 4.25 x 8 | 4.25 | 16.53       | 108 x 200    |
| x 8)                                 |          |   |      |          |      |             |              |




| TA2 Mounting bracket, double (Ø | 147-0097 | 5.12 | 4.25 x 8 4.25 | 16.53 | 108 x 200 |
|---------------------------------|----------|------|---------------|-------|-----------|
| 4.25 x 8)                       |          |      |               |       |           |




### FLC220 LED

# we-ef

| Description                          | Part ID  | А    | C1    | D × L1   | L   | Weight (lb) | $D \times S$ |
|--------------------------------------|----------|------|-------|----------|-----|-------------|--------------|
| TA3 Mounting bracket, triple (Ø 3.50 | 147-0025 | ±90° | 25.59 | 3.50 x 8 | 3.5 | 39.46       | 89 x 200     |
| x 8)                                 |          |      |       |          |     |             |              |




| TA3 Mounting bracket, triple (Ø 4.25 | 147-0098 | ±90° | 25.59" | 4.25 x 8 | 53.35 lbs | 108 x 200 |
|--------------------------------------|----------|------|--------|----------|-----------|-----------|
| x 8)                                 |          |      |        |          |           |           |




### FLC220 LED



| Description                         | Part ID  | А | C1   | D × L1 | L    | Weight (lb) | $D \times S$ |
|-------------------------------------|----------|---|------|--------|------|-------------|--------------|
| TA2 Mounting bracket, double (Ø 3 x | 147-0024 |   | 5.12 | 3 x 8  | 2.99 | 4.2 lbs     | 76 x 200     |
| 8)                                  |          |   |      |        |      |             |              |



| TA1 Mounting bracket, single (Ø 3 x | 147-0023 | 5.12 | 3 x 8 | 2.99 4.19 | 76 x 200 |
|-------------------------------------|----------|------|-------|-----------|----------|
| 8)                                  |          |      |       |           |          |




## **Pole clamp TS**

### FLC220 LED




| Description                                   | Part ID  | D1       | Weight (lb) | D       |
|---|----------|----------|-------------|---------|
| TS1-2/M12 Pole clamp, single (Ø<br>4.0"-4.5") | 147-0526 | 4.0-4.50 | 3.53        | 102-114 |






| TS1-2/M12 Pole clamp, single (Ø | 147-0544 | 114-133 | 3.75 | 114-133 |
|---------------------------------|----------|---------|------|---------|
| 4.5"-5.25")                     |          |         |      |         |




# we-ef

### FLC220 LED

| Description                     | Part ID  | D1       | Weight (lb) | D     |
|---------------------------------|----------|----------|-------------|-------|
| TS1-2/M12 Pole clamp, single (Ø | 147-0543 | 3.0-3.50 | 3.31        | 76-89 |
| 3"-3.5")                        |          |          |             |       |




| TS2-2/M12 Pole clamp, double (Ø | 147-0545 | 3.0"-3.5" | 3.09 lbs | 76-89 |
|---------------------------------|----------|-----------|----------|-------|
| 3"-3.5")                        |          |           |          |       |



# we-ef

### FLC220 LED

| Description                     | Part ID  | D1        | Weight (lb) | D       |
|---------------------------------|----------|-----------|-------------|---------|
| TS2-2/M16 Pole clamp, double (Ø | 147-0546 | 4.50-5.25 | 3.53        | 114-133 |
| 4.5"-5.25")                     |          |           |             |         |



# Pole top caps KF


| Description                      | Part ID  | D1   | D × L1   | Weight (lb) | D        |
|----------------------------------|----------|------|----------|-------------|----------|
| KF16-60/M16 Spigot Cap (Ø 2.36") | 310-9120 | 2.36 | 2.36 x 4 | 4.4 lbs     | 60 x 100 |




### FLC220 LED



| Description                     | Part ID  | D1 | D × L1 | Weight (lb) | D        |
|---------------------------------|----------|----|--------|-------------|----------|
| KF16-76/M16 Spigot Cap (Ø 3.0") | 310-9121 | 3  | 3 x 4  | 1.10 lbs    | 76 x 100 |




| KF16-89/M16 Spigot Cap (Ø 3. | 5") 300-0734 | 3.50 | $3.5 \times 3$ | 1.10 lbs | 89 |
|------------------------------|--------------|------|----------------|----------|----|
|                              |              |      |                |          |    |



### FLC220 LED




| Description                       | Part ID  | D1   | D × L1   | Weight (lb) | D   |
|-----------------------------------|----------|------|----------|-------------|-----|
| KF16-108/M16 Spigot Cap (Ø 4.25") | 300-0735 | 4.25 | 4.25 x 3 | 4.4 lbs     | 108 |



## **Wall Mount Bracket WMB**

| Description               | Part ID  | C1    | C2   | D1   | D2   | H1    | M1   | M2   | Weight (lb) |
|---------------------------|----------|-------|------|------|------|-------|------|------|-------------|
| WMB200 Wall mount bracket | 147-6015 | 20.28 | 4.72 | 9.25 | 7.88 | 11.34 | 1.05 | 0.47 | 20.0 lbs    |



## **Surface Mount Canopy SMC**

# we-ef


### FLC220 LED

| Description | Part ID  | D1    | D2   | Weight(lb) |
|-------------|----------|-------|------|------------|
| SMC-200     | 147-6915 | 10.83 | 9.25 | 15.4 lbs   |



## **Junction box**


| Description                    | Part ID  | Additional information  | Α    | В    | C1   | Weight (lb) |
|--------------------------------|----------|---|------|------|------|-------------|
| Junction box JB20 - Cable side | 310-9013 | Junction boxes are made from marine-grade, die-cast           | 7.09 | 5.63 | 2.01 | 2.25        |
| entries                        |          | aluminium alloy. IK10. IP66. For side entries and suitable to |      |      |      |             |
|                                |          | be used with cable glands.                                    |      |      |      |             |

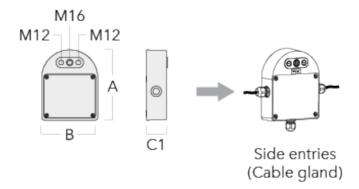

### FLC220 LED



| Description                              | Part ID  | Additional information  | Α    | В    | C1   | Weight (lb) |
|--|----------|---|------|------|------|-------------|
| Junction box JB20 - Conduit side entries | 310-9014 | Junction boxes are made from marine-grade, die-cast aluminium alloy. IK10. IP66. For side entries and suitable to | 7.09 | 5.63 | 2.01 | 2.25        |
|  |          | be used with conduits.  |      |      |      |             |

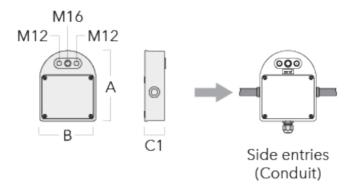


## **Pole clamp PC**


### FLC220 LED

# we-ef

| Description                                 | Part ID  | D1       | Weight (lb) |
|---|----------|----------|-------------|
| PC2 76-89/60 Pole clamp, double (Ø 3"-3 5") | 139-2703 | 3.0-3.50 | 2.20        |




PC1 76-89/60 Pole clamp, single (Ø 139-2702 3.0-3.50 2.20 3"-3.5")



# we-ef

### FLC220 LED


| Description                       | Part ID  | D1       | Weight (lb) |
|-----------------------------------|----------|----------|-------------|
| PC2 102-114/60 Pole clamp, double | 139-2707 | 4.0-4.50 | 2.65        |
| (Ø 4"-4.5")                       |          |          |             |



PC1 102-114/60 Pole clamp, single 139-2706 (Ø 4"-4,5")

4.0-4.50 2.65






### FLC220 LED

# we-ef

| Description Part II                                    | D1           | Weight (lb) |
|--|--------------|-------------|
| PC2 114-133/60 Pole clamp, double 139-2 (Ø 4.5"-5.25") | 709 4.5-5.25 | 3.10        |




PC1 114-133/60 Pole clamp, single (Ø 4.5"-5.25")

139-2708


4.5-5.25

3.10



### FLC220 LED

| Description                      | Part ID  | D1        | Weight (lb) |
|----------------------------------|----------|-----------|-------------|
| PC2 82-109/60 Pole clamp, double | 139-2705 | 3.20-4.30 | 2.40        |
| (Ø 3.25"-4.25")                  |          |           |             |




PC1 82-109/60 Pole camp, single (Ø 3.25"-4.3")

139-2704

3.20-4.30 2.40





## FLC220 LED



# **Optical Accessories**

## Wallwash lens

| Description      | Part ID  | C1   |  |  |
|------------------|----------|------|--|--|
| 10-20-FLC220-LED | 139-2035 | 5.75 |  |  |



# **Linear spread lens**

### FLC220 LED



| Description       | Part ID  | C1   |  |
|-------------------|----------|------|--|
| IO-180-FLC220-LED | 139-2036 | 5.75 |  |



## **Softening Lens**

| escription Part ID C       | C1   |
|----------------------------|------|
| -360-FIC220-IFD 139-2037 5 | 5.75 |



# **Honeycomb louvre**



# we-ef

| Description   | Part ID  | C1   |  |
|---------------|----------|------|--|
| IW-FLC220-LED | 139-2034 | 5.43 |  |



## **Glare shield**




### Snoot





| Description   | Part ID  | А    | C1   |  |
|---------------|----------|------|------|--|
| ET-FLC220-LED | 139-1987 | 4.92 | 7.48 |  |



# 139-2012 FLC220 LED

### **WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 Phone: +1 724 742 0030

> customersupport.usa@we-ef.com https://we-ef.com/us

Subject to technical changes and errors.

Generated on 10/23/2024

