



Description

IP66, Class I. IK07. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. PMMA-LED lens array. Remote 240 V gear to be ordered separately.

2700 K option available on request.


Weight	2.50 kg
Light distribution	linear spread, very narrow beam [EE]
Light source	LED-12/24W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	310
Total Lumen	3720
Tj	85
Rated lumens (lm)	
LED Lumen	244.5
Total Lumen	2933.4
Та	25



1930 cd/klm 8.3º/8.3º 30.4º/30.4º

C90/C270

60

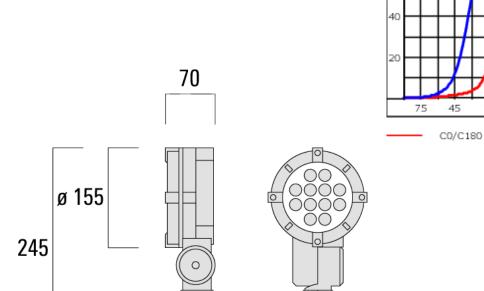

Specifications Material description

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK07

Corrosion resistance 5CE+Primer

WE-EF LIGHTING Pty Ltd

146-0604+146-0418





Electrical description

Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement
	located on www.we-ef.com for further details.






Optical Accessories


Glare shield

Description	Part ID A	C1
Glare shield ES	146-0156 110	100



Snoot

Description		C1
Spoot FT	S+ ET 1/4 0207 OF E	126





FLC131 LED #1


Surface wash lens

Description	Part ID	C1
10-360	146-0419	110



Linear spread lens

Description	Part ID	C1
IO-180-FLC131-LED	146-0418	110




146-0604+146-0418



FLC131 LED #1

Wallwash lens

Description	Part ID	C1
IO-20-WW-FLC131-LED	185-7029	110







Mounting Accessories

Ground spike EF

Description	Part ID	H1	Weight (kg)
Ground spike EF1	310-9102	270	1.20

