





Description

IP66, Class I. IK07. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. PMMA-LED lens array. Remote 240 V gear to be ordered separately.

2700 K option available on request.

| | |
|--------------------|--|
| Weight | 2.50 kg |
| Light distribution | linear spread, very narrow beam, sharp cut-off [EES] |
| Light source | LED-12/24W / 700 mA - 3000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 12 |
| Rated input power | 27 W |
| Nominal Lumen (lm) | |
| LED Lumen | 290 |
| Total Lumen | 3480 |
| Tj | 85 |
| Rated lumens (lm) | |
| LED Lumen | 238.8 |
| Total Lumen | 2865.9 |
| Ta | 25 |

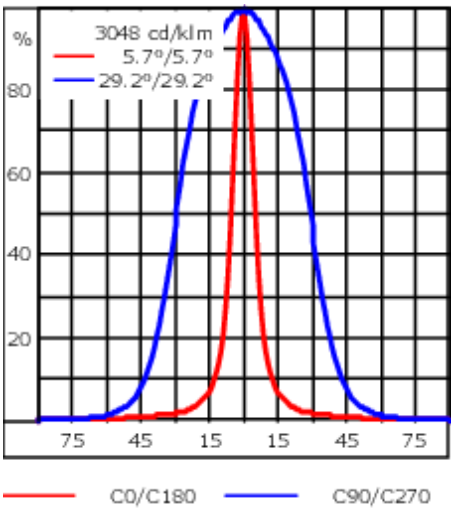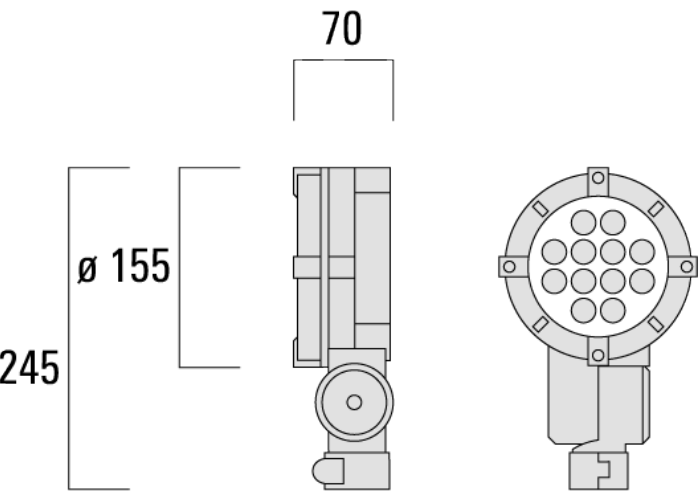

Specifications
Material description

| | |
|----------------------|--|
| Body | Marine-grade die-cast aluminium alloy |
| Lens | Safety glass lens |
| Colours | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE+Primer |

Electrical description

Additional information

| | |
|----------|--|
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |
|----------|--|

Optical Accessories

Glare shield

| Description | Part ID | A | C1 |
|-----------------|----------|-----|-----|
| Glare shield ES | 146-0156 | 110 | 100 |



Snoot


| Description | Part ID | A | C1 |
|-------------|----------|------|-----|
| Snoot ET | 146-0397 | 95,5 | 126 |



FLC131 LED #1


Surface wash lens

| Description | Part ID | C1 |
|-------------|----------|-----|
| IO-360 | 146-0419 | 110 |



Linear spread lens

| Description | Part ID | C1 |
|-------------------|----------|-----|
| IO-180-FLC131-LED | 146-0418 | 110 |



Wallwash lens

| Description | Part ID | C1 |
|---------------------|----------|-----|
| IO-20-WW-FLC131-LED | 185-7029 | 110 |



Mounting Accessories

Ground spike EF

| Description | Part ID | H1 | Weight (kg) |
|------------------|----------|-----|-------------|
| Ground spike EF1 | 310-9102 | 270 | 1.20 |

