



Description

IP66, Class I. IK07. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. PMMA-LED lens array. Remote 240v gear to be ordered separately.

2700 K option available on request.



Weight	1.70 kg
Light distribution	linear spread, very narrow beam [EE]
Light source	LED-6/12W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	14.5 W

Nominal Lumen (lm)

LED Lumen	290
Total Lumen	1740
T _j	85

Rated lumens (lm)

LED Lumen	231
Total Lumen	1386.3
T _a	25

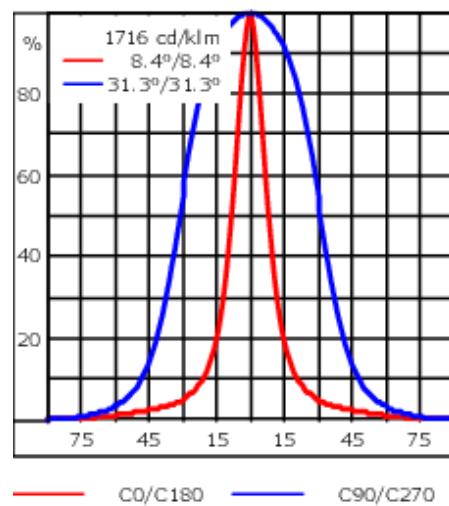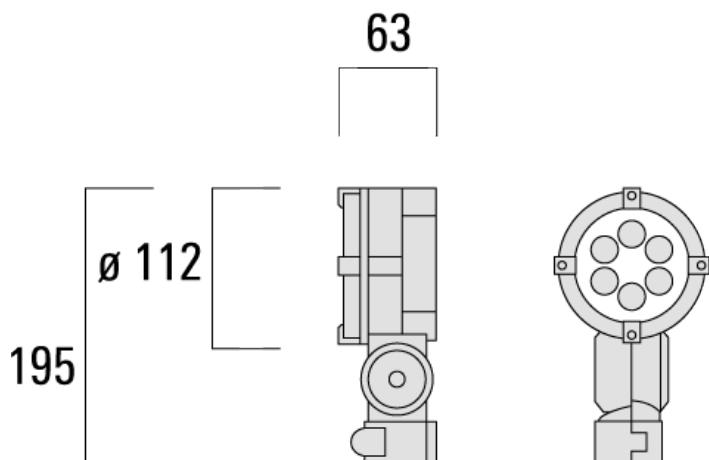

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description


Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
----------	--


FLC121 LED #1

Optical Accessories**Snoot**

Description	Part ID	A	C1
Snoot ET	145-0030	60	120

**Linear spread lens**


Description	Part ID	C1
IO-180-FLC121-LED	145-0050	81



FLC121 LED #1


Surface wash lens

Description	Part ID	C1
IO-360-FLC121-LED	145-9390	81



Honeycomb louvre

Description	Part ID	C1
IW-FLC121-LED	145-0143	81




145-0123+145-0050

we-ef

FLC121 LED #1

Wallwash lens


Description	Part ID	C1
IO-20-WW-FLC121-LED	145-0145	81



C1

Glare shield

Description	Part ID	A	C1
Glare shield ES	145-9192	102	119



C1

A

Mounting Accessories

Ground spike EF

Description	Part ID	H1	Weight (kg)
Ground spike EF1	310-9102	270	1.20

