

## ETC310-FS LED

**Description**


IP67. IK10+. Stainless steel construction including PCS hardware. Safety glass lens with opal diffuser, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. 1-10 V analogue dimming (where applicable) available on request. Luminaire installation blockout and sealable junction box included in supply.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).

Weight	2.70 kg
Light distribution	linear spread, very narrow beam [EE]
Light source	LED-3/6W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	7.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	310
Total Lumen	930
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	224.5
Total Lumen	673.5
T <sub>a</sub>	25

**ETC310-FS LED**

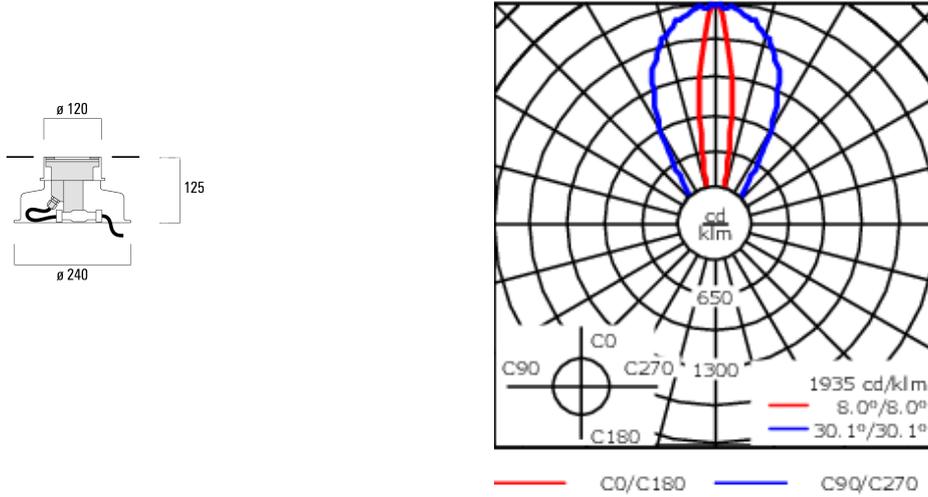

**Specifications**

**Material description**

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+
Corrosion resistance	-

**Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter


**Additional information**

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.
	Warranty void if installed without proper drainage.

## Optical Accessories


### Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-9612	60



### Surface wash lens

Description	Part ID	C1
Flood lens IO-360	185-9613	60




**ETC310-FS LED**

---

**Wallwash lens**


Description	Part ID	C1	Weight (kg)
Wallwash lens IO-20	185-9950	60	0.01



---

**Colour filter**

Description	Part ID
Colour filter IF	on request




**ETC310-FS LED**

---

**Honeycomb louvre**

Description	Part ID	C1
Honeycomb Louvre IW	185-7181	60



---

**Linear louvre**


Description	Part ID	C1
Linear louvre IL	185-7134	60



## Mounting Accessories

### Installation cover

Description	Part ID	C1
BE31	185-9961	125



### Installation blackout

Description	Part ID	D1	D2	H1	Weight (kg)
BET31	185-8411	119	240	126	0.90

