

ETC310-FS LED



Description

IP67. IK10+. Stainless steel construction including PCS hardware. Safety glass lens with opal diffuser, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable. Luminaire is factory-sealed and does not need to be opened during installation.



Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. 1-10 V analogue dimming (where applicable) available on request. Luminaire installation blockout and sealable junction box included in supply.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).

Weight	2.70 kg
Light distribution	flood, narrow beam, sharp cut-off [EES]
Light source	LED-3/6W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	7.5 W

Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	870
Tj	85

Rated lumens (lm)	
LED Lumen	218.8
Total Lumen	656.3
Ta	25

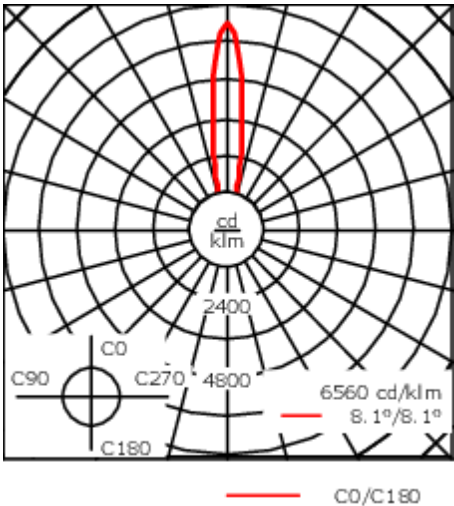

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<div></div> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+
Corrosion resistance	-

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
	Warranty void if installed without proper drainage.

Optical Accessories


Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-9612	60



Surface wash lens


Description	Part ID	C1
Flood lens IO-360	185-9613	60



ETC310-FS LED


Wallwash lens

Description	Part ID	C1	Weight (kg)
Wallwash lens IO-20	185-9950	60	0.01



Colour filter


Description	Part ID
Colour filter IF	on request



ETC310-FS LED

Honeycomb louvre

Description	Part ID	C1
Honeycomb Louvre IW	185-7181	60



Linear louvre


Description	Part ID	C1
Linear louvre IL	185-7134	60



Mounting Accessories

Installation cover

Description	Part ID	C1
BE31	185-9961	125



Installation blackout

Description	Part ID	D1	D2	H1	Weight (kg)
BET31	185-8411	119	240	126	0.90

