

## ETC320-FS LED

**Description**

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD-optimised optics for superior illumination and glare control.

Luminaire requires installation blockout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch **<strong><a href="https://vimeo.com/672613058">here.</a></strong>**

Weight	3.50 kg
Light distribution	flood, narrow beam, sharp cut-off [EES]
Light source	LED-6/12W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	14.5 W



**Nominal Lumen (lm)**

LED Lumen	310
Total Lumen	1860
T <sub>j</sub>	85

**Rated lumens (lm)**

LED Lumen	269.1
Total Lumen	1614.9
T <sub>a</sub>	25

## ETC320-FS LED

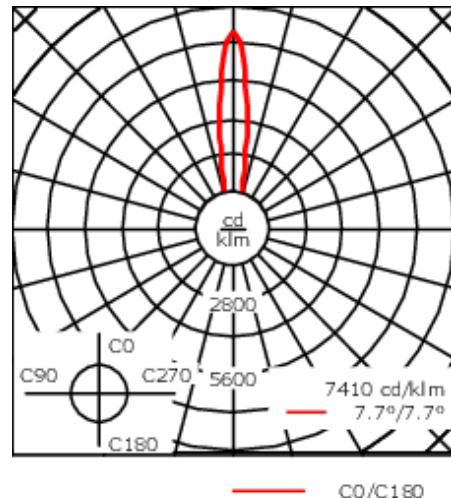**Specifications****Material description**

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<span style="background-color: #e0e0e0; display: inline-block; width: 20px; height: 10px; vertical-align: middle;"></span> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+

**Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Termination	Junction box supplied


**Additional information**

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.
----------	--

## **Mounting Accessories**

### **Installation cover**

Description	Part ID	C1
Installation cover BE	185-0796	160




C1

## Optical Accessories


### Colour filter

Description	Part ID
Colour filter IF	on request




### Surface wash lens

Description	Part ID	C1
Flood lens I0-360	146-0419	96




**ETC320-FS LED****Linear spread lens**

Description	Part ID	C1
IO-180-ETC/EVC_20-FS-LED	146-0418	110

**Wallwash lens**

Description	Part ID	C1
IO-20-WW-ETC/EVC_20-FS-LED	185-7029	110



**Honeycomb louvre**

Description	Part ID	C1
IW-E_C120/320-FS LED	146-0625	110

