

ETC330-FS LED



Description

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD-optimised optics for superior illumination and glare control. Luminaire requires installation blackout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.


IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).

|                    |                              |
|--------------------|------------------------------|
| Weight             | 6.40 kg                      |
| Light distribution | flood, very narrow beam [EE] |
| Light source       | LED-12/24W / 700 mA - 4000 K |
| CRI                | 80                           |
| Power supply       | EC                           |
| LEDs               | 12                           |
| Rated input power  | 27 W                         |

| Nominal Lumen (lm) |      |
|--------------------|------|
| LED Lumen          | 310  |
| Total Lumen        | 3720 |
| Tj                 | 85   |

| Rated lumens (lm) |        |
|-------------------|--------|
| LED Lumen         | 238.2  |
| Total Lumen       | 2857.9 |
| Ta                | 25     |

ETC330-FS LED

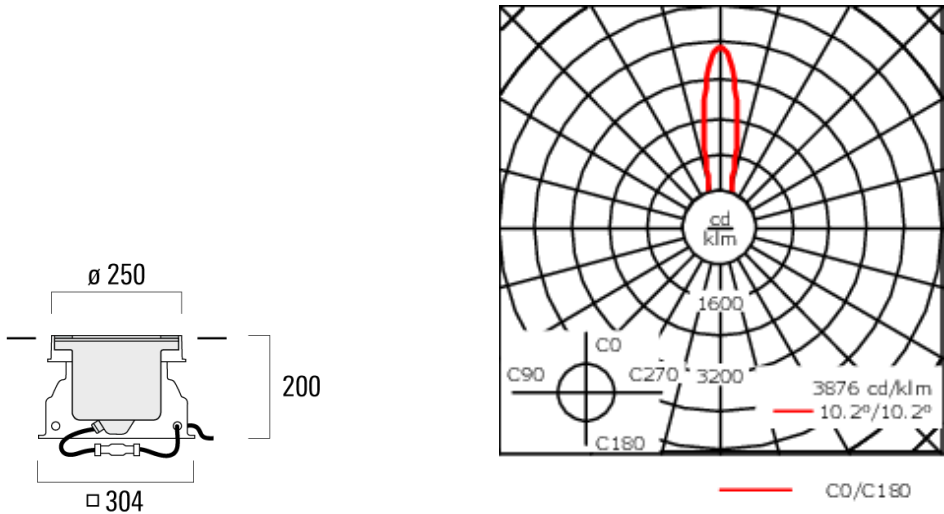

Specifications

Material description

|                    |                                                         |
|--------------------|---------------------------------------------------------|
| Body               | Stainless steel construction                            |
| Lens               | Safety glass lens, max. load 5 tonnes                   |
| Colours            | <div></div> Stainless Steel                             |
| Gasket             | Silicone rubber gasket                                  |
| Fasteners          | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP67                                                    |
| Impact resistance  | IK10+                                                   |

Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 230V / 50 Hz                     |
| Driver / Ballast | Integral EC electronic converter |
| Termination      | Junction box supplied            |


Additional information

|          |                                                                                                                                                                                                                                |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage. |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Mounting Accessories

Installation cover


| Description           | Part ID  | C1  |
|-----------------------|----------|-----|
| Installation cover BE | 185-0325 | 250 |



Optical Accessories


Linear spread lens

| Description               | Part ID  | C1  |
|---------------------------|----------|-----|
| Linear spread lens IO-180 | 185-7170 | 191 |



Surface wash lens


| Description       | Part ID  | C1  |
|-------------------|----------|-----|
| Flood lens IO-360 | 185-7171 | 191 |



ETC330-FS LED

Colour filter

| Description      | Part ID    |
|------------------|------------|
| Colour filter IF | on request |



Wallwash lens

| Description                | Part ID  | C1  |
|----------------------------|----------|-----|
| IO-20-WW-ETC/EVC_30-FS-LED | 185-8492 | 191 |

