



Description

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. ASC Anti Slip ceramic Coating on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gelimpregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver. Advanced thermal management protects LEDs while optimizing lumens output. LED module can be easily removed for upgrading.

The concrete-pour installation blockout is supplied as standard with luminaire.

Weight	22.00 lb
Light distribution	symmetric, narrow beam [N]
Light source	LED-12/24W / 700 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	310
Total Lumen	3720
Tj	85
Delivered lumens (lm)	
LED Lumen	238.2
Total Lumen	2857.9
Та	25

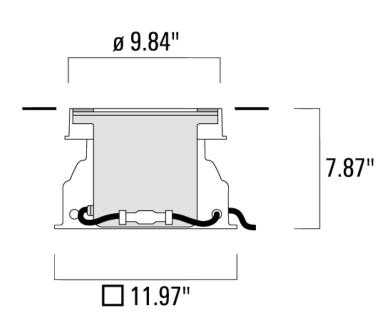



Specifications Material description

Body Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.

Lens Safety glass lens, max. load 5 tonnes

Colors Stainless Steel

Fasteners PCS polymer coated stainless steel

Ingress protection IP69K - HIGHEST PROTECTION RATING AVAILABLE

Impact resistance IK10+
Corrosion resistance 5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Termination	Factory sealed termination chamber

Additional information

Lifetime LED >60,000 h Ta 25°C (L70/B10) Control gear >50,000 h	h Ta 25°C
---	-----------


Dimming 0-10V available in request. Must be factory fitted.

Listings ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

Optical Accessories

Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7170	7.52





Softening Lens

Description	Part ID	C1
Flood lens IO-360	185-7171	6.30



Linear louvre


Description	Part ID (C1
Linear louvre IL	185-717	7.52





Honeycomb louvre

Description	Part ID	C1
Honeycomb Louvre IW	185-7180	7.53



Wallwash lens

escription	Part ID C1
-20-WW-ETC/EVC_30-FS	134-1492 7.52

