



#### **Description**

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. ASC Anti Slip ceramic Coating on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gelimpregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver. Advanced thermal management protects LEDs while optimizing lumens output. LED module can be easily removed for upgrading.

The concrete-pour installation blockout is supplied as standard with luminaire.

Weight	22.00 lb
Light distribution	linear spread, very narrow beam, 'sharp cut-off'
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	3480
Tj	85
Delivered lumens (lm)	
LED Lumen	231.7
Total Lumen	2779.9
Та	25

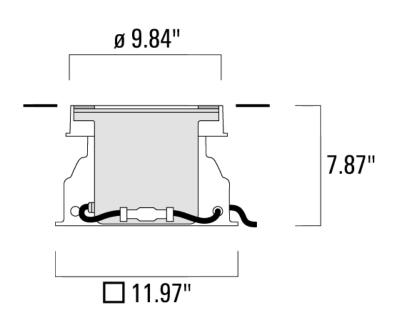



# Specifications Material description

Body Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.

Lens Safety glass lens, max. load 5 tonnes

Colors Stainless Steel

Fasteners PCS polymer coated stainless steel

Ingress protection IP69K - HIGHEST PROTECTION RATING AVAILABLE

Impact resistance IK10+
Corrosion resistance 5CE

### **Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Termination	Factory sealed termination chamber

#### **Additional information**

Lifetime LED >60,000 h Ta 25°C (L70/B10) Control gear >50,000 h	h Ta 25°C
---	-----------

Dimming 0-10V available in request. Must be factory fitted.

Listings ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

## **Optical Accessories**

## **Linear spread lens**

Description	Part ID	C1	
Linear spread lens IO-180	185-7170	7.52	





## **Softening Lens**

Description	Part ID	C1
Flood lens IO-360	185-7171	6.30




### **Linear louvre**

Description	D C1
Linear louvre IL	7172 7.52



## **Honeycomb louvre**

Description	Part ID	C1
Honeycomb Louvre IW	185-7180	7.53



## Wallwash lens

Description	Part ID C1
IO-20-WW-ETC/EVC_30-FS-L	134-1492 7.52

