

ETC330-FS LED**Description**


IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blockout and sealable junction box included in supply.


Weight	6.40 kg
Light distribution	linear spread, very narrow beam, sharp cut-off [EES]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	3480
Tj	85
Rated lumens (lm)	
LED Lumen	231.7
Total Lumen	2779.9
Ta	25

ETC330-FS LED

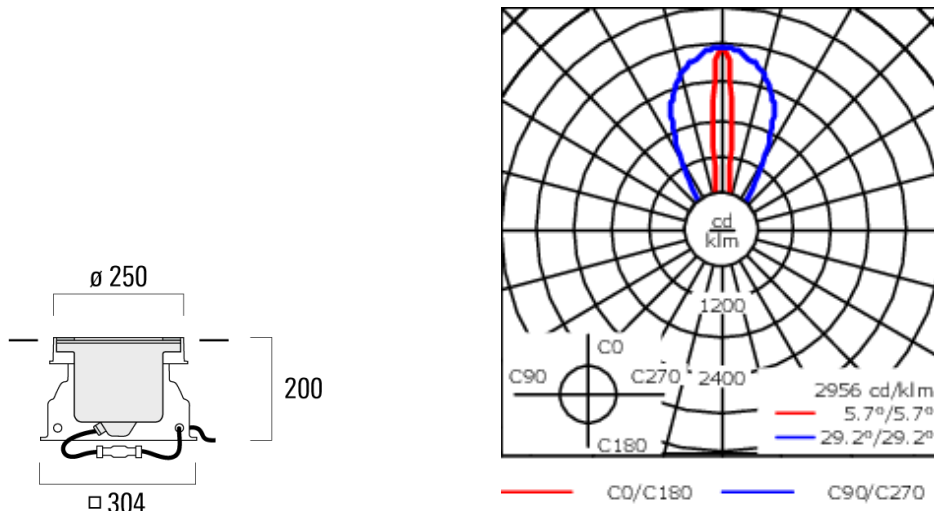

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP69
Impact resistance	IK10+

Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

ETC330-FS LED

Control

DALI interface

Description	Part ID
DALI interface	430-0013


1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0325	250




C1

Optical Accessories


Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-7170	191



Flood lens


Description	Part ID	C1
Flood lens IO-360	185-7171	191



ETC330-FS LED

Colour filter

Description	Part ID
Colour filter IF	on request



Linear louvre


Description	Part ID	C1
Linear louvre IL	185-7172	191



ETC330-FS LED


Honeycomb louvre

Description	Part ID	C1
Honeycomb Louvre IW	185-7180	191



Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	134-1492	191



ETC330-FS LED

Colour correction filter

Description	Part ID
IF-3000K > 2400K	185-7179

