

## ETC330-FS LED

**Description**

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD-optimised optics for superior illumination and glare control.

Luminaire requires installation blockout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch **<strong><a href="https://vimeo.com/672613058">here.</a></strong>**

|                    |  |
|--------------------|--|
| Weight             | 6.40 kg  |
| Light distribution | linear spread, very narrow beam, sharp cut-off [EES] |
| Light source       | LED-12/24W / 700 mA - 4000 K                         |
| CRI                | 80   |
| Power supply       | EC   |
| LEDs               | 12   |
| Rated input power  | 27 W   |



**Nominal Lumen (lm)**

|                |      |
|----------------|------|
| LED Lumen      | 310  |
| Total Lumen    | 3720 |
| T <sub>j</sub> | 85   |

**Rated lumens (lm)**

|                |        |
|----------------|--------|
| LED Lumen      | 247.6  |
| Total Lumen    | 2971.7 |
| T <sub>a</sub> | 25     |

## ETC330-FS LED

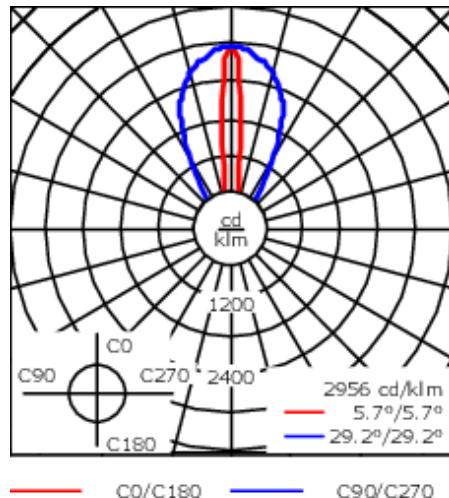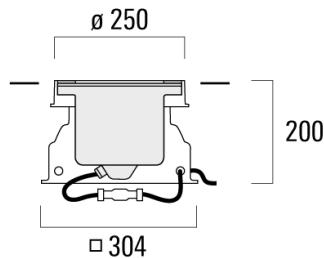**Specifications****Material description**

|                    |  |
|--------------------|--|
| Body               | Stainless steel construction   |
| Lens               | Safety glass lens, max. load 5 tonnes  |
| Colours            | <span style="background-color: #808080; display: inline-block; width: 20px; height: 10px; vertical-align: middle;"></span> Stainless Steel |
| Gasket             | Silicone rubber gasket   |
| Fasteners          | PCS Polymer Coated Stainless Steel Hardware (unpainted)  |
| Ingress protection | IP67   |
| Impact resistance  | IK10+  |

**Electrical description**

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 230V / 50 Hz                     |
| Driver / Ballast | Integral EC electronic converter |
| Termination      | Junction box supplied            |


**Additional information**

|          |  |
|----------|--|
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage. |
|----------|--|

## **Mounting Accessories**

### **Installation cover**

| Description           | Part ID  | C1  |
|-----------------------|----------|-----|
| Installation cover BE | 185-0325 | 250 |




C1

## Optical Accessories

### Linear spread lens


| Description               | Part ID  | C1  |
|---------------------------|----------|-----|
| Linear spread lens IO-180 | 185-7170 | 191 |



C1

### Surface wash lens

| Description       | Part ID  | C1  |
|-------------------|----------|-----|
| Flood lens IO-360 | 185-7171 | 191 |




C1

**ETC330-FS LED**

---

**Colour filter**

| Description      | Part ID    |
|------------------|------------|
| Colour filter IF | on request |



---

**Wallwash lens**

| Description                | Part ID  | C1  |
|----------------------------|----------|-----|
| IO-20-WW-ETC/EVC_30-FS-LED | 185-8492 | 191 |

