

## ETC340-FS LED

**Description**

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD-optimised optics for superior illumination and glare control.

Luminaire requires installation blockout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch **<strong><a href="https://vimeo.com/672613058">here.</a></strong>**

Weight	11.00 kg
Light distribution	linear spread, very narrow beam [EE]
Light source	LED-24/36W / 500 mA - 3000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	39 W



**Nominal Lumen (lm)**

LED Lumen	215
Total Lumen	5160
T <sub>j</sub>	85

**Rated lumens (lm)**

LED Lumen	167.9
Total Lumen	4028.9
T <sub>a</sub>	25

## ETC340-FS LED

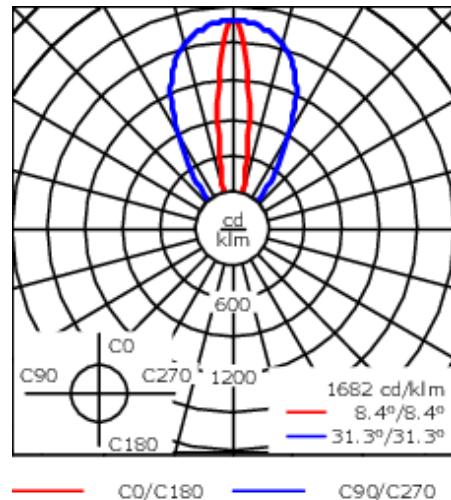**Specifications****Material description**

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<span style="background-color: #c0c0c0; display: inline-block; width: 15px; height: 15px;"></span> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+

**Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Termination	Junction box supplied


**Additional information**

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.
----------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## **Mounting Accessories**

### **Installation cover**


Description	Part ID	C1
Installation cover BE	185-0326	300



## Electrical Accessories

### Sealable junction box


Description	Part ID	C1	M1	M2
Sealable junction box SJB130	185-1624	146	Ø 10	Ø 12 - 19

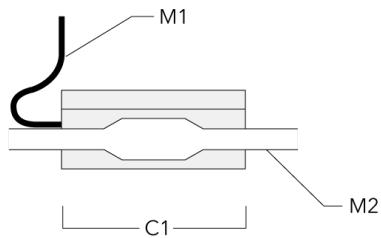

## Optical Accessories

### Surface wash lens


Description	Part ID	C1
Flood lens IO-360	185-7579	220



C1

### Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-7580	220



C1

**Wallwash lens**

Description	Part ID	C1
Wallwash lens IO-20	185-7589	220

