




Description

IP66/IP67. Class I. IK10. Marine-grade, all-aluminium construction. Pole section features galvanised steel reinforcement core. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Integral EC electronic converter in thermally-separated compartment. CAD-optimised optics for superior illumination and glare control OLC® One LED Concept. Factory installed LED circuit board. Pre-wired post complete with cable connecting box and fuse for mains connection. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Supplied as a complete luminaire (luminaire head and standpipe). Please note: The standpipe height must be entered for the photometric calculation.

| | |
|---------------------------|-------------------------------|
| Weight | 13.30 kg |
| Light distribution | rectangular, side throw [R45] |
| Light source | LED-3/9W / 1050mA - 4000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 3 |
| Rated input power | 11 W |
| Nominal Lumen (lm) | |
| LED Lumen | 450 |
| Total Lumen | 1350 |
| T _j | 85 |
| Rated lumens (lm) | |
| LED Lumen | 332.6 |
| Total Lumen | 997.8 |
| T _a | 25 |

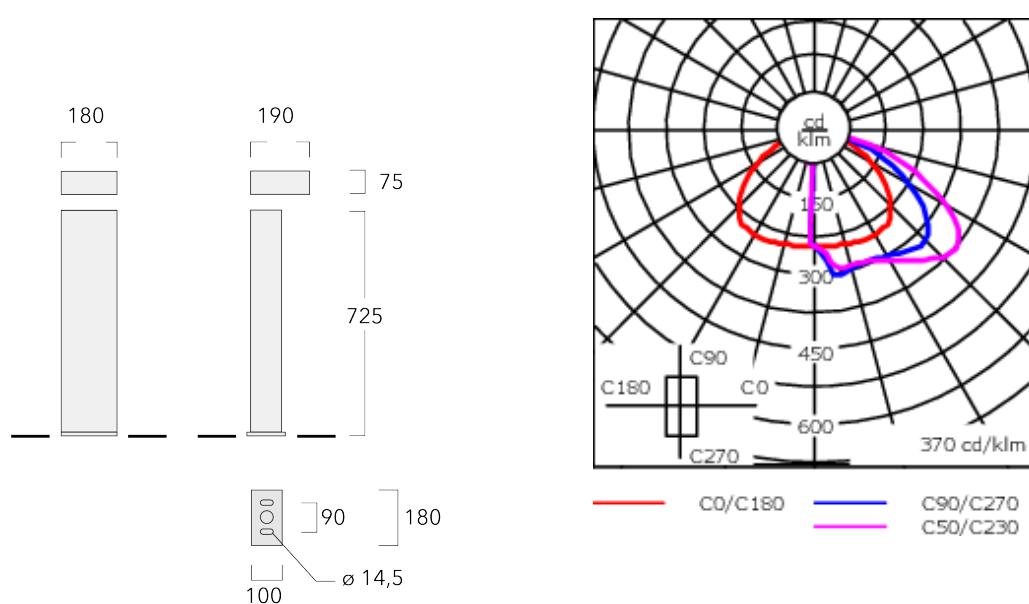

Specifications

Material description

| | |
|----------------------|--|
| Body | Marine-grade, all-aluminium construction. Pole section features galvanised steel reinforcement core |
| Colours | <div style="display: inline-block; width: 50px; height: 20px; background-color: black;"></div> RAL9004 Signal black <div style="display: inline-block; width: 50px; height: 20px; background-color: #e0e0e0;"></div> RAL9006 White aluminium <div style="display: inline-block; width: 50px; height: 20px; background-color: #808080;"></div> RAL9007 Grey aluminium |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP66/IP67 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE+Primer |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral EC electronic converter |


Additional information

| | |
|----------|--|
| Lifetime | T _a =40° L90B10 > 90000h |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |

Mounting Accessories

Planted root

| Description | Part ID | C1 | D1 | D2 | D3 | D4 | H1 | H2 | T2 | Weight(kg) |
|-------------------|----------|----|-----|----|----|-----|-----|----|----------|------------|
| Planted root ESV2 | 300-9115 | 76 | 120 | 90 | 95 | 200 | 400 | 10 | 62 x 100 | 3.80 |

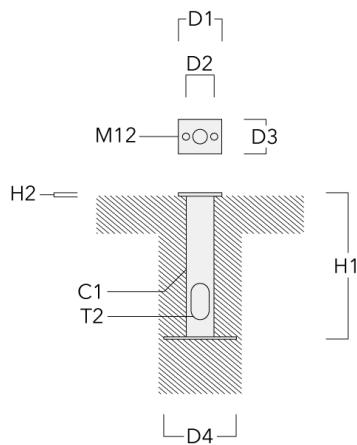

Control

DALI interface

| Description | Part ID | Additional information | C |
|----------------|----------|---|----|
| DALI interface | 430-0013 | DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear | 90 |

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!