



Description

IP66. Class I. IK10. Marine-grade, all aluminum construction. Pole section features galvanized steel reinforcement core. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Pre-wired post complete with 10kV surge protector in cable connection box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|--------------------------------------|
| Weight | 29.76 lb |
| Light distribution | rectangular asymmetric Type II [R45] |
| Light source | LED-3/13W / 1400 mA - 4000 K |
| CRI | 80 |
| Power supply | electronic gear |
| BUG | B0 U0 G1 |
| LEDs | 3 |
| Rated input power | 15 W |

Nominal Lumen (lm)



| | |
|-------------|------|
| LED Lumen | 575 |
| Total Lumen | 1725 |
| Tj | 85 |

Delivered lumens (lm)

| | |
|-------------|------|
| LED Lumen | 425 |
| Total Lumen | 1275 |
| Ta | 25 |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 06/08/2025

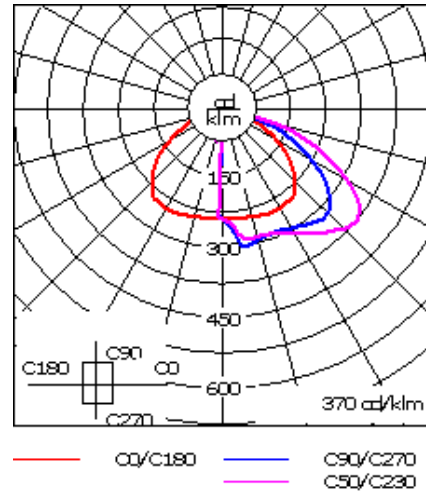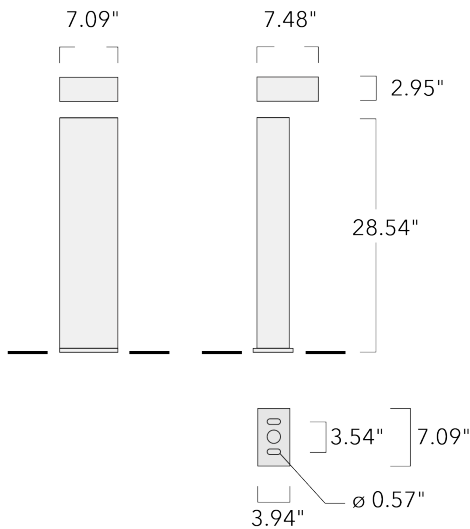

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, all-aluminium construction. Pole section features galvanised steel reinforcement core |
| Colors | <div style="display: flex; flex-direction: column; gap: 5px;"> <div> RAL9004 Black</div> <div> RAL9007 Grey Metallic</div> <div> RAL9016 White</div> <div> RAL8019 Dark Bronze</div> </div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS hardware |
| Ingress protection | IP66/IP67 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | Integral 10kV Surge Protector |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
 customersupport.usa@we-ef.com - <https://we-ef.com/us>
 Subject to technical changes and errors. - Generated on 06/08/2025

114-0133

PSY414 LED

we-ef

Additional information

| | |
|------------|---|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 06/08/2025

Mounting Accessories

Planted root

| Description | Part ID | C1 | D1 | D2 | D3 | D4 | H1 | H2 | T2 | Weight (lb) |
|-------------------|----------|------|------|------|------|------|-------|------|----------|-------------|
| Planted root ESV2 | 300-9115 | 2.99 | 4.72 | 3.54 | 3.74 | 7.87 | 15.75 | 0.39 | 62 x 100 | 8.37 |

