

**FLB141 LED #4 WALL BRACKET MOUNT Asymmetric****Description**

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Mount permits 350° rotation and 180° tilt.



Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	15.21 lb
Light distribution	[P65] Type II Medium
Light source	LED-6/26W / 1400 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	6
Rated input power	27 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	575
Total Lumen	3450
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	339.6
Total Lumen	2037.5
T <sub>a</sub>	25

## FLB141 LED #4 WALL BRACKET MOUNT Asymmetric

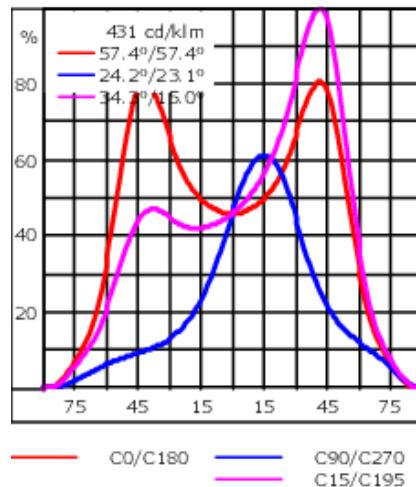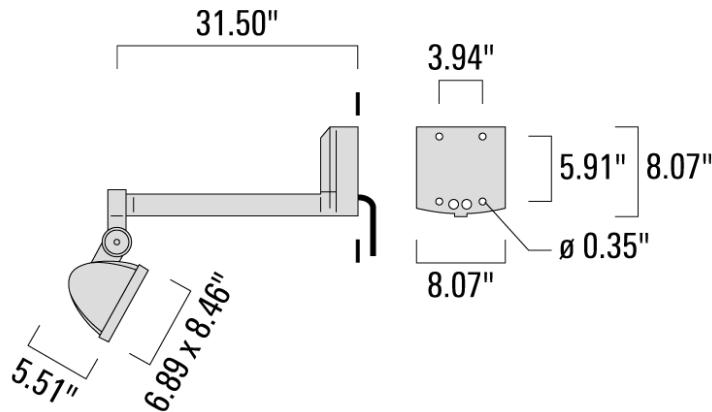

## Specifications

## Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: black; border: 1px solid black;"></span>  RAL9004 Black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #808080; border: 1px solid black;"></span>  RAL9007 Grey Metallic         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #F0F0F0; border: 1px solid black;"></span>  RAL9016 White         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 15px; background-color: #8B4513; border: 1px solid black;"></span>  RAL8019 Dark Bronze         </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK08
Corrosion resistance	5CE

**FLB141 LED #4 WALL BRACKET MOUNT Asymmetric****Electrical description**

---


Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment

---

**Additional information**


**FLB141 LED #4 WALL BRACKET MOUNT Asymmetric****Optical Accessories****Wire guard**

Description	Part ID	C1	H1
Wire guard EG	161-9118	7.13	6.02




**FLB141 LED #4 WALL BRACKET MOUNT Asymmetric****Barn doors**

Description	Part ID	A	H1
Barn doors ED	161-9119	9.65	5.2

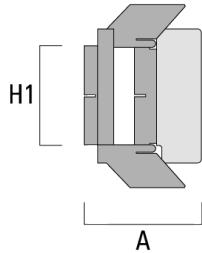**Glare shield**

Description	Part ID	A	H1
Glare shield ES	161-9121	6.5	5.20



**FLB141 LED #4 WALL BRACKET MOUNT Asymmetric****Honeycomb louvre**

Description	Part ID	C1
Honeycomb Louvre IW	146-0625	4.33

