

#### **Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Knuckle permits  $350^{\circ}$  horizontal and  $90^{\circ}$  vertical aiming of optics.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	20.00 lb		
Light distribution	symmetric, very narrow beam, 'sharp cut-off' [VNS]		
Light source	LED-24/48W / 700 mA - 4000 K		
CRI	80		
Power supply	electronic gear		
LEDs	24		
Rated input power	54 W		
Nominal Lumen (lm)			
LED Lumen	310		
Total Lumen	7440		
Tj	85		
Delivered lumens (lm)			
LED Lumen	287		
Total Lumen	6887		
Та	25		

#### FLC141 LED - Ceon

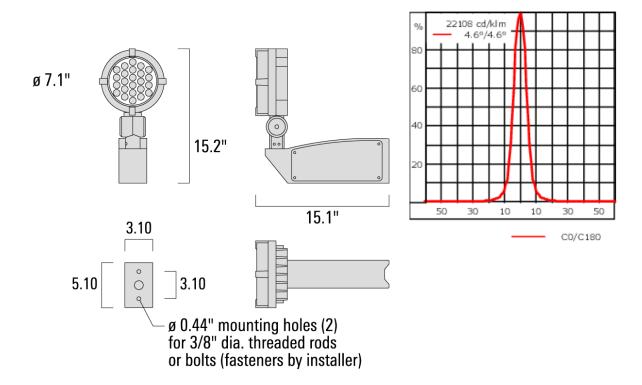

# **Specifications Material description**

Body	Marine-grade, die-cast aluminium alloy				
Lens	Safety glass lens				
Colors	RAL9004 Black				
	RAL9007 Grey Metallic				
	RAL9016 White				
	RAL8019 Dark Bronze				
Gasket	Silicone CCG® Controlled Compression Gasket				
Fasteners	PCS Polymer Coated Stainless Steel Hardware				
Ingress protection	IP66				
Corrosion resistance	5CE				

Integral EC electronic converter, thermally separated

Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

#### WE-EF LIGHTING USA, LLC

Power supply
Driver / Ballast

146-6005

we-ef

FLC141 LED - Ceon

# **Additional information**




# FLC141 LED - Ceon

# **Optical Accessories**

# **Glare shield**

Description	Part ID	Α	C1
Glare shield ES	146-0229	4.72	5.71





# FLC141 LED - Ceon

#### Snoot

Description	Part ID	Α	C1
Snoot ET	146-0398	4.72	5.70

