### FLC230 LED COLOR CHANGER



#### Description

RGBW/RGBA Color Changer.

IP66. Class I. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands; one for power, one for DMX. CADoptimized optics for superior illumination and glare control. Integral driver, thermally separated. OLC® One LED Concept. Factory-installed LED circuit board. DMX interface.

Color Boost technology: With Color Boost the targeted and selective control of individual channels or colors means that a higher power of the LEDs can be accessed than in total when all colors are simultaneously operated. The light output is thus maximized by targeted control of individual channels/colors.

For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1.5 + DMX".

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

#### WE-EF LIGHTING USA, LLC


Weight	16.76 lb
Light distribution	symmetric, wide beam [W]
Light source	LED-12/48W - RGBA
Power supply	electronic gear
LEDs	12
Rated input power	49 W
Nominal Lumen (lm)	
LED Lumen	345
Total Lumen	4140
Tj	85
Delivered lumens (lm)	
LED Lumen	252.2
Total Lumen	3026.9
Та	25

### FLC230 LED COLOR CHANGER

Example: XXX-XXXX-9004 (Black) + XXX-XXXX (Accessory 1)

139-2137

# FLC230 LED COLOR CHANGER

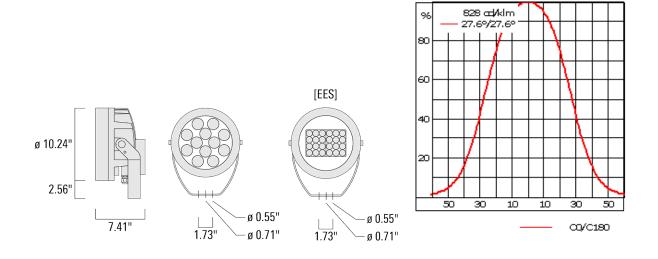

# Specifications Material description

BodyMarine-grade, die-cast aluminium alloyLensSafety glass lensColorsImage: RAL9004 BlackImage: RAL9007 Grey MetallicRAL9007 Grey MetallicRAL9016 WhiteRAL8019 Dark BronzeGasketSilicone CCG® Controlled Compression GasketFastenersPCS Polymer Coated Stainless Steel HardwareIngress protectionIP66Impact resistanceK07Corrosion resistance5CE superior corrosion protection systemWindage0.684		
ColorsImage: RAL9004 BlackRAL9007 Grey MetallicRAL9016 WhiteRAL9016 WhiteRAL8019 Dark BronzeGasketSilicone CCG® Controlled Compression GasketPos Polymer Coated Stainless Steel HardwareIngress protectionIP66Impact resistanceIK07Corrosion resistanceScE superior corrosion protection system	Body	Marine-grade, die-cast aluminium alloy
RAL9004 BlackRAL9007 Grey MetallicRAL9016 WhiteRAL9016 WhiteRAL8019 Dark BronzeGasketSilicone CCG® Controlled Compression GasketFastenersPCS Polymer Coated Stainless Steel HardwareIngress protectionIP66Impact resistanceK07Corrosion resistanceSCE superior corrosion protection system	Lens	Safety glass lens
RAL9016 WhiteRAL8019 Dark BronzeGasketSilicone CCG® Controlled Compression GasketFastenersPCS Polymer Coated Stainless Steel HardwareIngress protectionIP66Impact resistanceIK07Corrosion resistance5CE superior corrosion protection system	Colors	RAL9004 Black
RAL8019 Dark BronzeGasketSilicone CCG® Controlled Compression GasketFastenersPCS Polymer Coated Stainless Steel HardwareIngress protectionIP66Impact resistanceIK07Corrosion resistance5CE superior corrosion protection system		RAL9007 Grey Metallic
GasketSilicone CCG® Controlled Compression GasketFastenersPCS Polymer Coated Stainless Steel HardwareIngress protectionIP66Impact resistanceIK07Corrosion resistance5CE superior corrosion protection system		RAL9016 White
FastenersPCS Polymer Coated Stainless Steel HardwareIngress protectionIP66Impact resistanceIK07Corrosion resistance5CE superior corrosion protection system		RAL8019 Dark Bronze
Ingress protectionIP66Impact resistanceIK07Corrosion resistance5CE superior corrosion protection system	Gasket	Silicone CCG <sup>®</sup> Controlled Compression Gasket
Impact resistanceIK07Corrosion resistance5CE superior corrosion protection system	Fasteners	PCS Polymer Coated Stainless Steel Hardware
Corrosion resistance 5CE superior corrosion protection system	Ingress protection	IP66
	Impact resistance	IK07
Windage 0.684	Corrosion resistance	5CE superior corrosion protection system
	Windage	0.684

# FLC230 LED COLOR CHANGER

### **Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V.
Driver / Ballast	Integral EC electronic converter with DMX Interface
Power factor	> 0.9
Surge protection	Integral 10kV Surge Protector

### **Additional information**

Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. Meets ANSI C136.31 - 3G Vibration
	Rating for Bridge and Overpass Applications.

## FLC230 LED COLOR CHANGER

# **Mounting Accessories**

### Floodlight mounting bracket TA

Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
FA1 Mounting bracket, single (Ø 4.25 < 8)	147-0096		5.12	4.25 x 8	4.25	16.53	108 x 200
		D x L1					
		 □ C1					
A2 Mounting bracket, double (Ø 1.25 x 8)	147-0097		5.12	4.25 x 8	4.25	16.53	108 x 200
		D x L1					
	Ш						


#### WE-EF LIGHTING USA, LLC




# we-ef

# FLC230 LED COLOR CHANGER

Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
TA2-L Mounting bracket, double (Ø 4.25 x 8)	147-0148	±90°	16.54	4.25 x 8	4.25	44.53	108 x 200




TA2-L Mounting bracket, double (Ø 3	147-0105	±90°	16.54	3 x 8	2.99	35.49	76 x 200
x 8)							



# we-ef


### FLC230 LED COLOR CHANGER

Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
TA3 Mounting bracket, triple (Ø 3.50	147-0025	±90°	25.59	3.50 x 8	3.5	39.46	89 x 200
x 8)							



 TA3 Mounting bracket, triple (Ø 4.25
 147-0098
 ±90°
 25.59"
 4.25 x 8
 53.35 lbs
 108 x 200

 x 8)




#### WE-EF LIGHTING USA, LLC


# we-ef

# FLC230 LED COLOR CHANGER

TA4 Mounting bracket, quad (Ø 3.50 147-0099 ±90° 25.59 3.50 x 8 45.86 lbs 89 x 200	Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
	TA4 Mounting bracket, quad (Ø 3.50	147-0099	±90°	25.59	3.50 x 8		45.86 lbs	89 x 200



TA4 Mounting bracket, quad (Ø 4.25	147-0100	±90°	25.59	4.25 x 8	53.00	108 x 200
x 8)						



#### WE-EF LIGHTING USA, LLC

# we-ef

# **FLC230 LED COLOR CHANGER**


Description	Part ID	А	C1	D × L1	L	Weight (lb)	D × S
TA2 Mounting bracket, double (Ø 3 x 8)	147-0024		5.12	3 x 8	2.99	4.2 lbs	76 x 200
		C1					
TA1 Mounting bracket, single (Ø 3 x 8)	147-0023		5.12	3 x 8	2.99	4.19	76 x 200
		D x L1					

# FLC230 LED COLOR CHANGER


### Pole clamp TS

Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø	147-0526	4.0-4.50	3.53	102-114
4.0"-4.5")				





TS1-2/M12 Pole clamp, single (Ø 147-0544 114-133 3.75 114-133 4.5"-5.25")



WE-EF LIGHTING USA, LLC 410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - https://we-ef.com/us


Subject to technical changes and errors. - Generated on 08/16/2025

# we-ef

# FLC230 LED COLOR CHANGER

Description	Part ID	D1	Weight (lb)	D
TS1-2/M12 Pole clamp, single (Ø 3"-3.5")	147-0543	3.0-3.50	3.31	76-89
	D1			


TS2-2/M12 Pole clamp, double (Ø 147-0545 3.0"-3.5" 3.09 lbs 76-89 3"-3.5")




# we-ef

## FLC230 LED COLOR CHANGER

Description	Part ID	D1	Weight (lb)	D	
IS2-2/M16 Pole clamp, double (Ø 4.5"-5.25")	147-0546	4.50-5.25	3.53	114-133	



Planted root									
Description	Part ID	D1	D2	D3	D4	H1	H2	M1	Weight (lb)
Planted root ESV4	300-0461	5.71	5.12	4.01	4.25	15.75	13.78	.31	15.54



#### WE-EF LIGHTING USA, LLC

# FLC230 LED COLOR CHANGER

### Pole top caps KF

Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-60/M16 Spigot Cap (Ø 2.36")	310-9120	2.36	2.36 x 4	4.4 lbs	60 x 100
	D1				
(F16-76/M16 Spigot Cap (Ø 3.0")	310-9121	3	3 x 4	1.10 lbs	76 x 100

# FLC230 LED COLOR CHANGER


Description	Part ID	D1	D × L1	Weight (lb)	D
KF16-89/M16 Spigot Cap (Ø 3.5")	300-0734	3.50	3.5 x 3	1.10 lbs	89
KF16-108/M16 Spigot Cap (Ø 4.25")	300-0735	4.25	4.25 x 3	4.4 lbs	108

we-ef

# FLC230 LED COLOR CHANGER


### Short post EM

Description	Part ID D1	ע ענ או	M1 Weight (lb)
EM1-M16 AL	270-0001 6.3"	6.3" 5.12" 8"	0.35" 4.85 lbs



## Surface Mount Canopy SMC


Description	Part ID	D1	D2	Weight (lb)
SMC-200	147-6915	10.83	9.25	15.4 lbs




# FLC230 LED COLOR CHANGER


### Pole clamp PC

Description	Part ID	D1	Weight (lb)
PC2 76-89/60 Pole clamp, double (Ø	139-2703	3.0-3.50	2.20
3"-3.5")			



PC1 76-89/60 Pole clamp, single (Ø 139-2702 3.0-3.50 2.20 3"-3.5")






#### WE-EF LIGHTING USA, LLC


# we-ef

# FLC230 LED COLOR CHANGER

Description	Part ID	D1	Weight (lb)
PC2 102-114/60 Pole clamp, double	139-2707	4.0-4.50	2.65
(Ø 4"-4.5")			




PC1 102-114/60 Pole clamp, single 139-2706 4.0-4.50 2.65 (Ø 4"-4,5")




# we-ef

# FLC230 LED COLOR CHANGER




PC1 114-133/60 Pole clamp, single 139-2708 4.5-5.25 3.10 (Ø 4.5"-5.25")




# FLC230 LED COLOR CHANGER

Description	Part ID	D1	Weight (lb)
PC2 82-109/60 Pole clamp, double	139-2705	3.20-4.30	2.40

(Ø 3.25"-4.25")



PC1 82-109/60 Pole camp, single (Ø 139-2704 3.20-4.30 2.40 3.25"-4.3")



#### WE-EF LIGHTING USA, LLC 410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/16/2025

we-ef

### FLC230 LED COLOR CHANGER

# we-ef

# **Optical Accessories**

### Glare shield

Description	Part ID	А	C1
ES-FLC230-LED	139-1852	6.26	10.47




ES-FLC230-CC-LED	139-6970	6.29 10.47		
c				
	A			

## FLC230 LED COLOR CHANGER



#### Snoot

Description	Part ID	А	C1		
ET-FLC230-LED	139-1853	6.3	10.47		




ET-FLC230-CC-LED	139-6974	6.29 10.47		
	C1			

# FLC230 LED COLOR CHANGER




### Linear spread lens

Description	Part ID	C1
IO-180-FLC230-LED	139-1849	7.80



## **Softening Lens**




# we-ef

# FLC230 LED COLOR CHANGER

# Wallwash lens

Description	Part ID	C1
10-20-FLC230-LED	139-1848	7.83



# FLC230 LED COLOR CHANGER

# Control

### **DMX Controller**

Description	Part ID
DMX Controller	400-0469

### **DMX Controller (smart)**

Description	Part ID	Additional information
DMX Controller (smart)	400-0470	IP20. The Touch Panel is an untutive abd easy-to use keypad or one DMX universe. It can store up to 36 scences; alternatively, via



24 of 27

we-ef

# FLC230 LED COLOR CHANGER

we-ef

### **DMX Booster Box**

Description	Part ID
DMX Booster Box	400-0474



## **DMX Termination Plug**

Description	Part ID	
DMX Termination Plug	400-0475	



### FLC230 LED COLOR CHANGER



### **DMX Plug and Socket**

Description	Part ID
DMX Plug and Socket	400-0479



### **DMX Combination Cable**

Description	Part ID
DMX Combination Cable	400-0480



# FLC230 LED COLOR CHANGER

we-ef

### **DMX Wireless Repeater**

Description	Part ID
DMX Wireless Repeater	400-0477



### **DMX Wireless Transceiver**

Description	Part ID		
DMX Wireless Transceiver	400-0476		
	ZEVER		