



Description

RGBW/RGBA Color Changer. ASC Lens accessory can be added.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Optional with Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10) available on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Cable gland with spiral cable bending protection. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. Color Boost technology. DMX interface. Gimbal mounted, 360° rotatable and 30° tilttable. 'No tool' removable gear/lens tray.

Suitable for flush installation in concrete or earth. The concrete-pour installation blackout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must

| | |
|--------------------|--------------------------|
| Weight | 18.20 lb |
| Light distribution | symmetric, wide beam [W] |
| Light source | LED-12/19W - RGBA |
| CRI | 20 |
| Power supply | electronic gear |
| LEDs | 12 |
| Rated input power | 21 W |

| Nominal Lumen (lm) | |
|--------------------|------|
| LED Lumen | 170 |
| Total Lumen | 2040 |
| Tj | 85 |

| Delivered lumens (lm) | |
|-----------------------|--------|
| LED Lumen | 117.9 |
| Total Lumen | 1414.5 |
| Ta | 25 |

185-3414

we-ef

ETC130-GB-CC LED COLOR CHANGER

be specified separately.

Example: XXX-XXXX-9004 (Black).



+ XXX-XXXX (Accessory 1)

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 08/15/2025

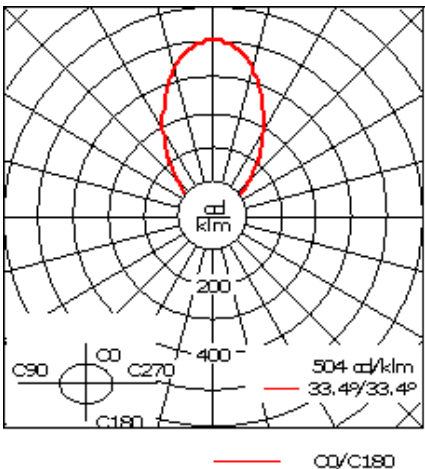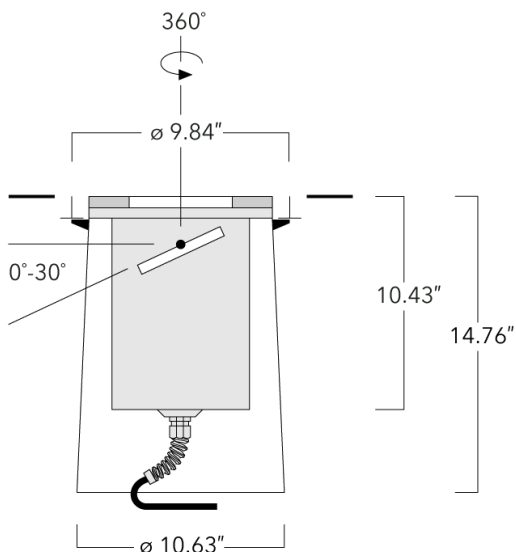

Specifications

Material description

| | |
|--------------------|---|
| Body | Luminaire body constructed of deep drawn stainless steel, outer housing of composite material |
| Lens | 5/8" thick clear tempered glass lens. Max. load 5000kg/11,000 lbs. |
| Colors | <div></div> Stainless Steel |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP69K - HIGHEST PROTECTION RATING AVAILABLE |
| Impact resistance | IK10+ |

Electrical description

| | |
|------------------|-------------------------------|
| Power supply | Integral DMX 120V-277V Driver |
| Driver / Ballast | Integral driver |
| Power factor | > 0.9 |


Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

Electrical Accessories

Sealable junction box

| Description | Part ID | C1 | M1 | M2 |
|-------------------------------|----------|------|--------|---------------|
| Sealable junction box SJB 130 | 185-1624 | 5.75 | Ø 0.39 | Ø 0.47 - 0.75 |

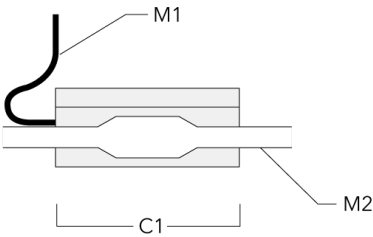

ETC130-GB-CC LED COLOR CHANGER

Control

DMX Wireless Antenna

| Description | Part ID |
|-----------------|----------|
| Antenna RF1.8dB | 430-0018 |

DMX Controller

| Description | Part ID | Additional information |
|----------------|----------|---|
| DMX Controller | 400-0469 | IP20. DIN Rail system. Is designed for either live or stand-alone control. It features one DMX universe, a USBconnection, 128k flash memory for storing stand-alone programs. |

DMX Controller (smart)

| Description | Part ID | Additional information |
|------------------------|----------|---|
| DMX Controller (smart) | 400-0470 | IP20. The Touch Panel is an untutive abd easy-to use keypad or one DMX universe. It can store up to 36 scences; alternatively, via |



ETC130-GB-CC LED COLOR CHANGER

DMX Booster Box

| Description | Part ID |
|--------------------------------------|----------|
| DMX Booster Box for DMX cable system | 400-9006 |



DMX Wireless Repeater

| Description | Part ID |
|-----------------------|----------|
| DMX Wireless Repeater | 400-0477 |



ETC130-GB-CC LED COLOR CHANGER

DMX Wireless Transceiver

| Description | Part ID |
|--------------------------|----------|
| DMX Wireless Transceiver | 400-0476 |



DMX Termination Plug

| Description | Part ID |
|----------------------|----------|
| DMX Termination Plug | 400-0475 |

