



Description

DOC140-FT LED for remodel projects. For new construction, see DOC140-FT LED [New Construction] version.

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver, thermally separated. Darklight anodized aluminum reflector for superior illumination and glare control. Factory installed LED circuit board. DMX interface.

A maximum of one internal optical accessory, to be specified at time of ordering.



This product is suitable for insulated ceilings (IC Rated).

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|--------------------------|
| Weight | 6.17 lb |
| Light distribution | symmetric, wide beam [W] |
| Light source | LED-FT-24W (3000K) |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 1 |
| Rated input power | 27 W |

| | |
|-----------------------|--------|
| Delivered lumens (lm) | |
| LED Lumen | 2292.2 |
| Total Lumen | 2292.2 |
| Ta | 25 |

| | |
|--------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 4340 |
| Total Lumen | 4340 |
| Tc | 25 |

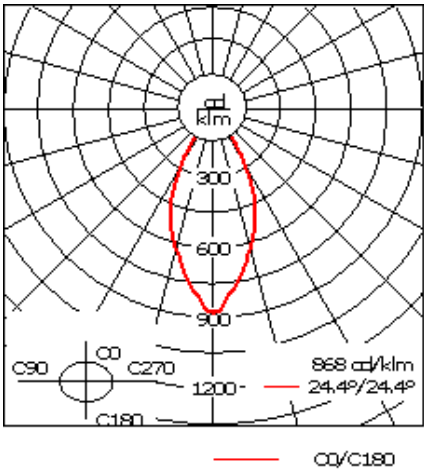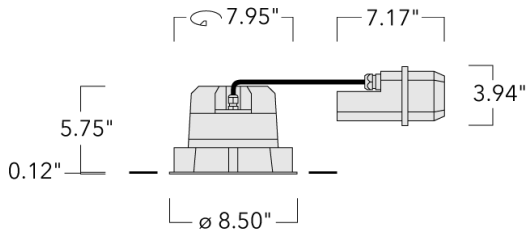

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, die-cast aluminium alloy |
| Lens | Safety glass lens |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |
| Power factor | > 0.9 |


Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L70B50 > 50000h |
| Listings | ETL listed. Suitable for wet locations. IC rated (for insulated ceilings). |

Optical Accessories

Linear spread lens


| Description | Part ID | C1 |
|----------------------|----------|------|
| IO-180-DOC140-LED-FT | 134-1816 | 6.73 |



DOC140-FT LED [For Remodel]

Softening Lens

| Description | Part ID | C1 |
|----------------------|----------|------|
| IO-360-DOC140-LED-FT | 134-1818 | 6.73 |



Wallwash lens

| Description | Part ID | C1 |
|------------------------|----------|------|
| IO-20-WW-DOC140-LED-FT | 134-1817 | 6.73 |

