

Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A preinstallation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	6.40 lb	
Light distribution	linear spread, medium beam [M]	
Light source	LED-12/24W / 700 mA - 4000 K	
CRI	80	
Power supply	electronic gear	
LEDs	12	
Rated input power	27 W	
Nominal Lumen (lm)		
LED Lumen	310	
Total Lumen	3720	
Tj	85	
Delivered lumens (lm)		
LED Lumen	262.3	
Total Lumen	3147.9	
Та	25	



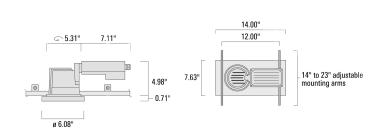



Specifications

Material description

Body Luminaire body constructed in die cast aluminum.

Lens Clear tempered glass lens.

Colors Stainless Steel

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Additional information

Lifetime	LED >60,000 h Ta 25°(L70/B10) Control gear >50.000 h Ta 25°
----------	---

Listings ETL listed. Suitable for wet applications.




Mounting Accessories

Installation blockout

Description	Part ID	А	В	C1	C	
Installation blockout BDO22-I	134-0797	15.08"	7.87"	8.23"	195	







Optical Accessories

Softening Lens

Description	Part ID	C1
IO-360-DAC/DOC220-LED	134-1440	4.13





Honeycomb louvre

Description	Part ID	C1
IW-DOC22_LED	134-1444	4.13



Wallwash lens

Description	t ID C1
IO-20-WW-DAC/DOC220-LED	l-1491 4.13





Linear spread lens

Description	Part ID	C1	
IO-180-DAC/DOC220-LED	134-1381	4.13	

