

FLD111 LED Wall bracket




Description

IP66, Class I. IK07. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Knuckle permits 350° horizontal and 180° vertical aiming of optics.

Weight	3.10 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-3/9W / 1050mA - 3000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	11 W
Nominal Lumen (lm)	
LED Lumen	430
Total Lumen	1290
Tj	85
Rated lumens (lm)	
LED Lumen	280.5
Total Lumen	841.5
Ta	25

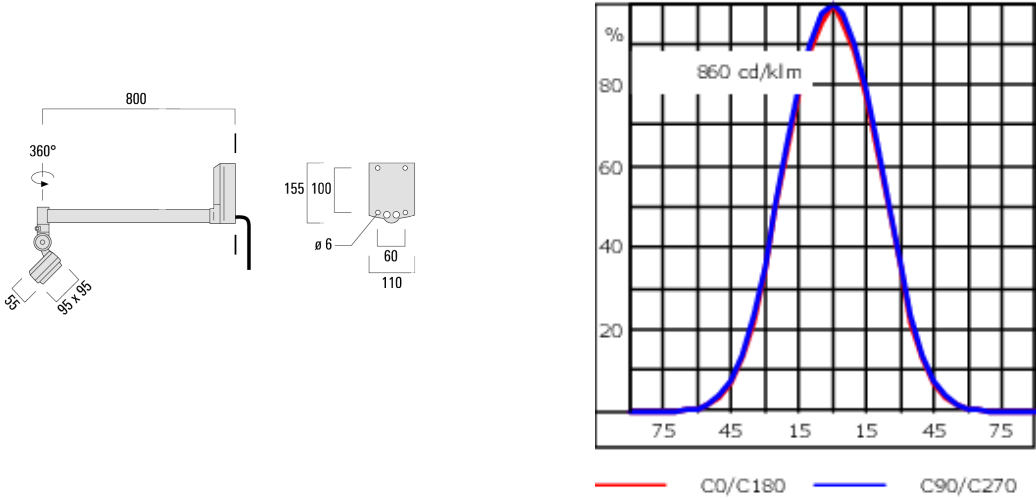

Specifications

Material description

Body	Marine-grade, all-aluminium construction
Lens	Safety glass lens
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description


Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
------------------	---

Additional information

Optical Accessories


Optical Adaptor

Description	Part ID	A	C1
External optical adaptor EA	145-9830	53	91



Glare shield


Description	Part ID	A	C1
Glare shield ES	145-9831	53	91



FLD111 LED Wall bracket


Snoot

Description	Part ID	A	C1
Snoot ET	145-9832	53	91



Linear spread lens


Description	Part ID	C1
Linear spread lens EO-180	145-9833	68



FLD111 LED Wall bracket


Flood lens

Description	Part ID	C1
Flood lens EO-360	145-9834	68



Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	145-9846	71



Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90