

STL134 LED Shallow Depth




**Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry. Second cable entry for through wiring available on request.

Weight	0.65 kg
Light distribution	shielded
Light source	LED-6W / 350 mA - 4000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	8 W
Rated lumens (lm)	
LED Lumen	26.6
Total Lumen	26.6
Ta	25
Nominal Lumen (lm)	
LED Lumen	1110
Total Lumen	1110
Tc	25

STL134 LED Shallow Depth

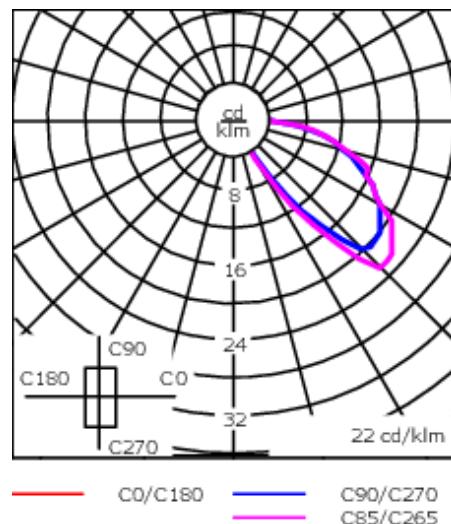

Specifications

Material description

Body Marine-grade, die-cast aluminium alloy

Lens Polycarbonate

Colours █ RAL9004 Signal black

█ RAL9007 Grey aluminium

█ RAL7016 Anthracite grey

█ RAL9016 Traffic white

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66

Impact resistance IK07

Corrosion resistance 5CE

Electrical description

Power supply 220-240V / 50-60 Hz

Driver / Ballast Integral EC electronic converter

Additional information