

## SVL134 LED Reduced Depth


**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

Weight	0.80 kg
Light distribution	Shielded
Light source	LED-6W / 350 mA - 3000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	8 W
<b>Rated lumens (lm)</b>	
LED Lumen	18.7
Total Lumen	18.7
Ta	25
<b>Nominal Lumen (lm)</b>	
LED Lumen	1050
Total Lumen	1050
Tc	25

## SVL134 LED Reduced Depth

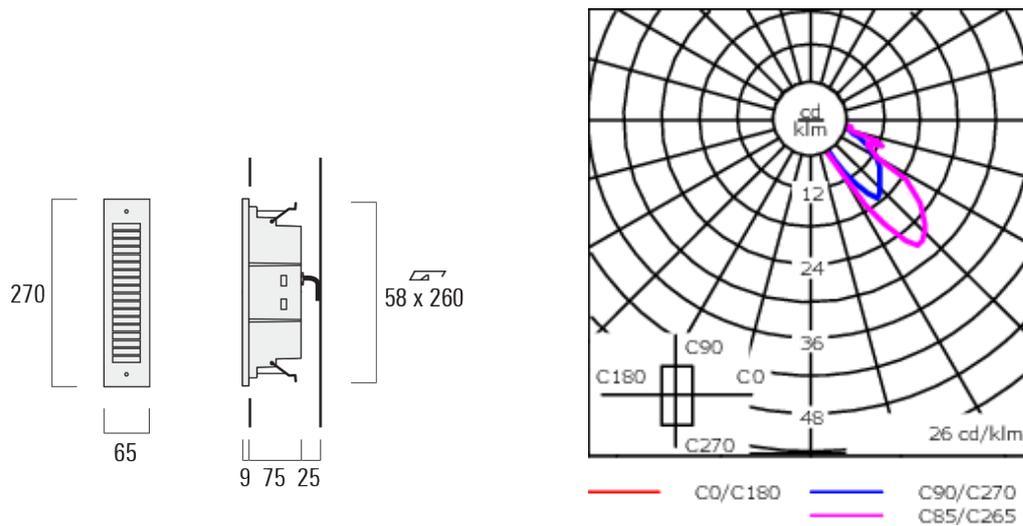

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate
Colours	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> <span>RAL9004 Signal black</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #cccccc; margin-right: 5px;"></div> <span>RAL9006 White aluminium</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> <span>RAL9007 Grey aluminium</span> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

### Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

### Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.
----------	--