

## SVL134 LED Reduced Depth

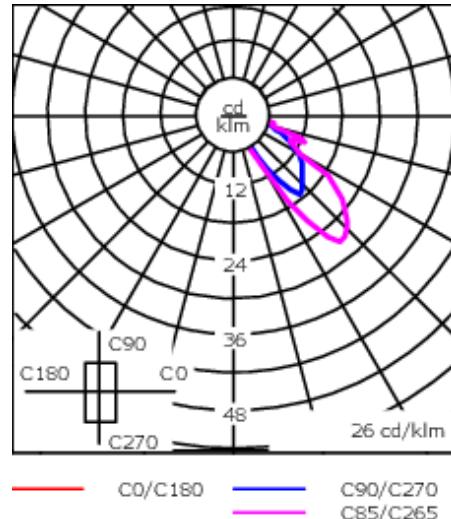
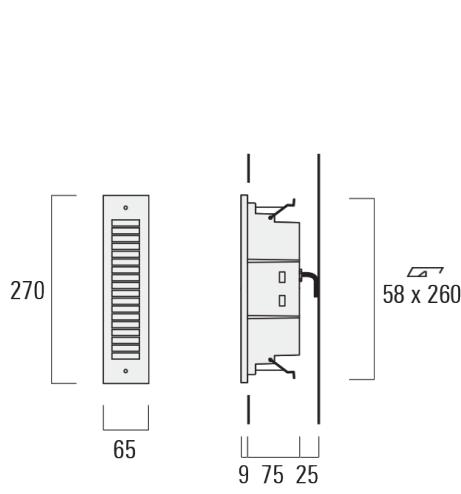
**Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

Weight	0.80 kg
Light distribution	shielded
Light source	LED-6W / 350 mA - 3000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	8 W
<b>Rated lumens (lm)</b>	
LED Lumen	18.7
Total Lumen	18.7
Ta	25
<b>Nominal Lumen (lm)</b>	
LED Lumen	1050
Total Lumen	1050
Tc	25

## SVL134 LED Reduced Depth

**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate
Colours	<div style="display: inline-block; width: 100px; height: 15px; background-color: black;"></div> RAL9004 Signal black <div style="display: inline-block; width: 100px; height: 15px; background-color: #a9a9a9;"></div> RAL9007 Grey aluminium <div style="display: inline-block; width: 100px; height: 15px; background-color: #333333;"></div> RAL7016 Anthracite grey <div style="display: inline-block; width: 100px; height: 15px; background-color: #e0e0e0;"></div> RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

**Electrical description**

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

**Additional information**