

SVL134 LED Shallow Depth



Description

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.


Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry. Second cable entry for through wiring available on request.

|                    |                          |
|--------------------|--------------------------|
| Weight             | 0.65 kg                  |
| Light distribution | shielded                 |
| Light source       | LED-6W / 350 mA - 4000 K |
| CRI                | 80                       |
| Power supply       | EC                       |
| LEDs               | 1                        |
| Rated input power  | 8 W                      |

|                   |      |
|-------------------|------|
| Rated lumens (lm) |      |
| LED Lumen         | 19.8 |
| Total Lumen       | 19.8 |
| Ta                | 25   |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 1110 |
| Total Lumen        | 1110 |
| Tc                 | 25   |

SVL134 LED Shallow Depth

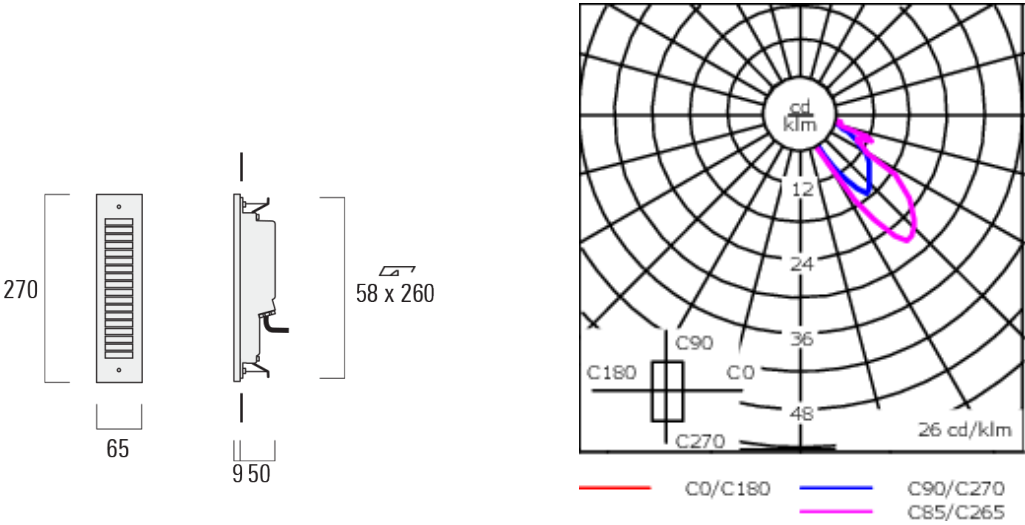

Specifications

Material description

|                      |                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, die-cast aluminium alloy                                                                                                                                                |
| Lens                 | Polycarbonate                                                                                                                                                                         |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone rubber gasket                                                                                                                                                                |
| Fasteners            | PCS hardware                                                                                                                                                                          |
| Ingress protection   | IP66                                                                                                                                                                                  |
| Impact resistance    | IK07                                                                                                                                                                                  |
| Corrosion resistance | 5CE                                                                                                                                                                                   |

Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 220-240V / 50-60 Hz              |
| Driver / Ballast | Integral EC electronic converter |

Additional information