



Description

IP66. Class I. IK08. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. CAD-optimized optics for superior illumination and glare control. Integral driver. Advanced thermal management protects LEDs while optimizing lumens output. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Luminaire can be mounted for up or down lighting.



Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.  
Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

For DarkSky compliant configurations of this product, please find the spec sheet and DarkSky certificate in the library.

|                    |                               |
|--------------------|-------------------------------|
| Weight             | 11.46 lb                      |
| Light distribution | symmetric, medium beam [M]    |
| Light source       | LED-12/36W / 1050 mA - 3000 K |
| CRI                | 80                            |
| Power supply       | electronic gear               |
| BUG                | B3 U0 G0                      |
| LEDs               | 12                            |
| Rated input power  | 41 W                          |

| Nominal Lumen (lm) |      |
|--------------------|------|
| LED Lumen          | 430  |
| Total Lumen        | 5160 |
| Tj                 | 85   |

| Delivered lumens (lm) |        |
|-----------------------|--------|
| LED Lumen             | 340    |
| Total Lumen           | 4079.4 |
| Ta                    | 25     |

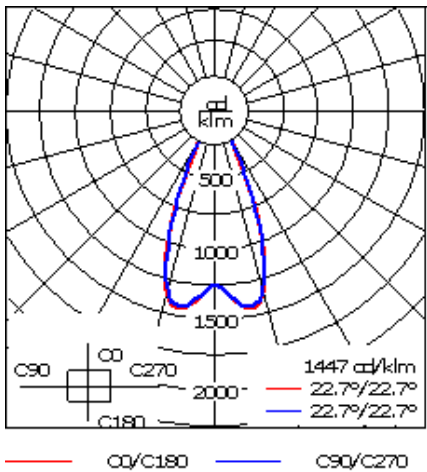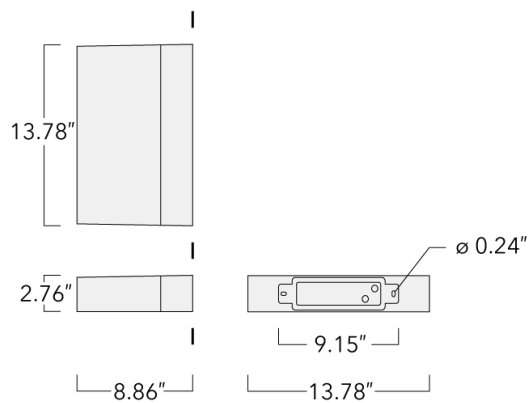

Specifications  
Material description

|                      |   |
|----------------------|---|
| Body                 | Marine-grade, die-cast aluminium alloy  |
| Lens                 | Safety glass lens   |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket   |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware   |
| Ingress protection   | IP66  |
| Impact resistance    | IK08  |
| Corrosion resistance | 5CE   |

Electrical description

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Standard. Optional DALI version available. To be specified at time of ordering.         |

131-9673

PLS430 LED



Additional information

|            |   |
|------------|---|
| Lifetime   | Ta=25°/40° L90B10 > 90000h  |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings   | ETL listed. Suitable for wet locations.   |

131-9673


PLS430 LED



Optical Accessories


Colour correction filter

| Description      | Part ID  |
|------------------|----------|
| IF-3000K > 2400K | 131-9685 |



Honeycomb louvre

| Description         | Part ID  | C1    | H1   |
|---------------------|----------|-------|------|
| Honeycomb louvre IW | 131-9684 | 12.13 | 2.80 |

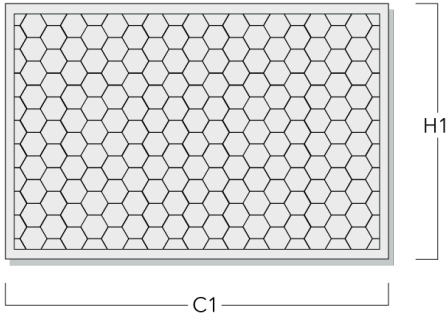

Light shield

| Description | Part ID  | Additional information  |
|-------------|----------|---|
| LS180-[A60] | 430-0038 | Light shield LS180 to greatly reduce or eliminate light pollution.<br>PA injection moulded component, black matt.<br>Suitable for asymmetric light distribution [A60].                          |
| LS180       | 430-0029 | Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit.<br>Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering. |

131-9673


PLS430 LED

we-ef

Mounting Accessories

Bird deterrent

| Description       | Part ID  |
|-------------------|----------|
| Bird deterrent BD | 131-9688 |



Surface Collar

| Description                | Part ID  | D1  |
|----------------------------|----------|-----|
| PLS430 Surface Conduit Kit | 131-6904 | 1/2 |

131-9673

PLS430 LED



Electrical Accessories

Emergency Lighting Package

| Description                               | Part ID  | Additional information  |
|---|----------|---|
| _LS420/430 LED Emergency Lighting Package | 131-6900 | Emergency battery backup operating for a minimum 90 minutes when power is lost. |

131-9673

PLS430 LED



Control

Photocell

| Description                 | Part ID  |
|-----------------------------|----------|
| PLS430 Button Photocell Kit | 131-6902 |