



Description

IP65. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming on request.

Can be mounted up or down.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

|                    |                             |
|--------------------|-----------------------------|
| Weight             | 25.10 lb                    |
| Light distribution | symmetric, medium beam [M]  |
| Light source       | LED-24/36W / 500 mA - 2700K |
| CRI                | 80                          |
| Power supply       | electronic gear             |
| LEDs               | 24                          |
| Rated input power  | 39 W                        |

| Nominal Lumen (lm) |      |
|--------------------|------|
| LED Lumen          | 200  |
| Total Lumen        | 4800 |
| Tj                 | 85   |

| Delivered lumens (lm) |        |
|-----------------------|--------|
| LED Lumen             | 173.8  |
| Total Lumen           | 4170.5 |
| Ta                    | 25     |

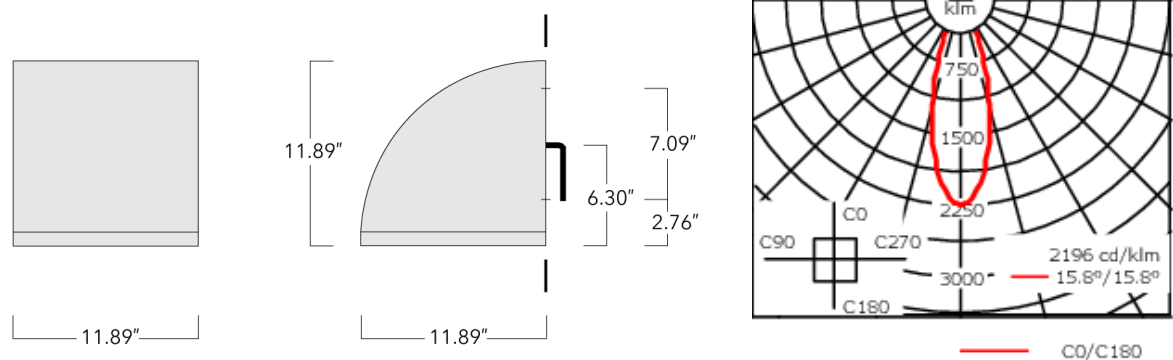

Specifications  
Material description

|                      |   |
|----------------------|---|
| Body                 | Luminaire body and lens frame constructed in die cast aluminum.   |
| Lens                 | Tempered glass lens.  |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone rubber gasket  |
| Fasteners            | PCS polymer coated stainless steel  |
| Ingress protection   | IP65  |
| Impact resistance    | IK07  |
| Corrosion resistance | 5CE   |

Electrical description

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |

Additional information

|          |   |
|----------|---|
| Lifetime | Ta=25°/40° L90B10 > 90000h              |
| Listings | ETL listed. Suitable for wet locations. |

132-0644

OLV340 LED



Electrical Accessories

Emergency Lighting Package

| Description                           | Part ID  | Additional information  |
|---------------------------------------|----------|---|
| OLV34_ LED Emergency Lighting Package | 132-6901 | Emergency battery backup operating for a minimum of 90 minutes, at full power, when main power is lost. |