



### Description



RGBW Colour Changer. IP67. Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tilttable and 355° rotatable. LED circuit board with WE-EF Colour Boost Technology. DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch **<strong><a href="https://vimeo.com/672613058">here.</a></strong>**

Weight	12.00 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-12/25W - RGBW
CRI	20/80
Power supply	EC
LEDs	12
Rated input power	26 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	247.5
Total Lumen	2970
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	171.6
Total Lumen	2059.3
T <sub>a</sub>	25

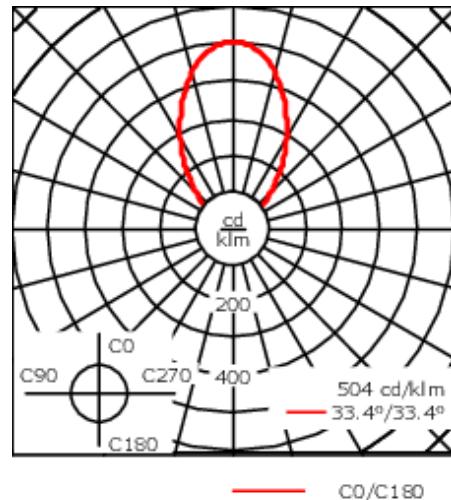

## Specifications

### Material description

Body Stainless steel construction

Lens Safety glass lens, max. load 5 tonnes

Colours  Stainless Steel

Gasket Silicone rubber gasket

Fasteners PCS hardware

Ingress protection IP67

Impact resistance IK10+

### Electrical description

Power supply 220-240V / 50-60 Hz

Driver / Ballast Integral EC electronic converter with DMX Interface

Termination Junction box supplied

### Additional information

Warranty

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on [www.we-ef.com](http://www.we-ef.com) for further details. Warranty void if installed without proper drainage.

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300




C1

## Optical Accessories


### Optical Adaptor

Description	Part ID
Internal optical Adaptor IA	185-7419



### Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7581	149



## ETC340-GB CC LED

**Surface wash lens**

Description	Part ID	C1
Flood lens I0-360	185-7582	149

**Linear louvre**

Description	Part ID	C1
Linear louvre LL	185-9568	149



## Control

### DMX Wireless Antenna

Description	Part ID
Antenna RF1.8dB	430-0018
Antenna RF5dB	430-0036

### DMX Wireless Repeater

Description	Part ID
DMX Wireless Repeater	400-0477



**DMX Wireless Transceiver**

---

Description	Part ID
DMX Wireless Transceiver	400-0476

---

