





Description

RGBW Colour Changer. IP67. Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. LED circuit board with WE-EF Colour Boost Technology. DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

| | |
|---------------------------|----------------------------|
| Weight | 12.00 kg |
| Light distribution | symmetric, medium beam [M] |
| Light source | LED-12/25W - RGBW |
| CRI | 20/80 |
| Power supply | EC |
| LEDs | 12 |
| Rated input power | 26 W |
| Nominal Lumen (lm) | |
| LED Lumen | 247.5 |
| Total Lumen | 2970 |
| Tj | 85 |
| Rated lumens (lm) | |
| LED Lumen | 171.1 |
| Total Lumen | 2053.3 |
| Ta | 25 |

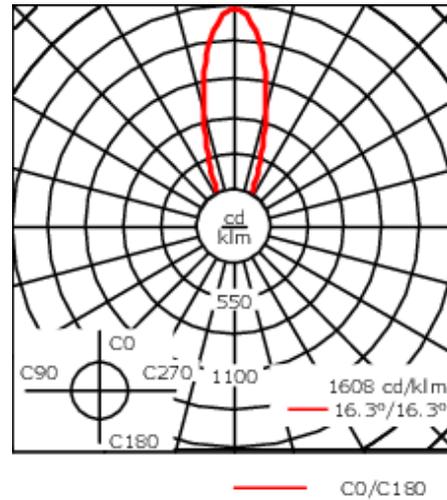

Specifications

Material description

| | |
|--------------------|---|
| Body | Stainless steel construction |
| Lens | Safety glass lens, max. load 5 tonnes |
| Colours |  Stainless Steel |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS hardware |
| Ingress protection | IP67 |
| Impact resistance | IK10+ |

Electrical description

| | |
|------------------|---|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter with DMX Interface |
| Termination | Junction box supplied |


Additional information

| | |
|----------|--|
| Warranty | |
|----------|--|

Mounting Accessories

Installation cover


| Description | Part ID | C1 |
|-----------------------|----------|-----|
| Installation cover BE | 185-0326 | 300 |



Optical Accessories


Optical Adaptor

| Description | Part ID |
|-----------------------------|----------|
| Internal optical Adaptor IA | 185-7419 |




Linear spread lens

| Description | Part ID | C1 |
|---------------------------|----------|-----|
| Linear spread lens IO-180 | 185-7581 | 149 |



Flood lens

| Description | Part ID | C1 |
|-------------------|----------|-----|
| Flood lens IO-360 | 185-7582 | 149 |




Linear louvre

| Description | Part ID | C1 |
|------------------|----------|-----|
| Linear louvre IL | 185-9568 | 149 |



Honeycomb louvre

| Description | Part ID | C1 |
|---------------------|----------|----|
| Honeycomb Louvre IW | 185-2958 | 96 |



Control

DMX Wireless Antenna

| Description | Part ID |
|-----------------|----------|
| Antenna RF1.8dB | 430-0018 |

DMX Wireless Repeater

| Description | Part ID |
|-----------------------|----------|
| DMX Wireless Repeater | 400-0477 |



DMX Wireless Transceiver

| Description | Part ID |
|--------------------------|----------|
| DMX Wireless Transceiver | 400-0476 |

