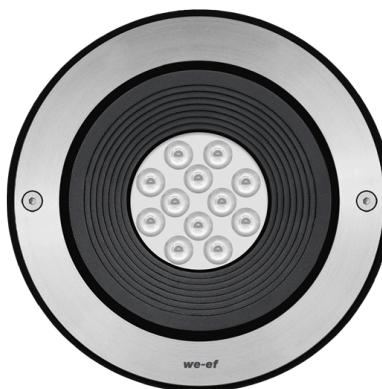


ETC330-FS CC LED COLOR CHANGER

**Description**

RGBW Color Changer.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. LED circuit board. Color Boost technology. Advanced thermal management protects LEDs while optimizing lumens output. LED boards can be easily removed for upgrading. DMX interface. For other control interface options to suit specific project requirements, contact WE-EF.



The concrete-pour installation blockout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|------------------------------|--------------------------|
| Weight | 22.0 lb |
| Light distribution | symmetric, wide beam [W] |
| Light source | LED-12/19W - RGBW/4K |
| CRI | 20/80 |
| Power supply | electronic gear |
| LEDs | 12 |
| Rated input power | 23 W |
| Nominal Lumen (lm) | |
| LED Lumen | 160 |
| Total Lumen | 1920 |
| T _j | 85 |
| Delivered lumens (lm) | |
| LED Lumen | 110.9 |
| Total Lumen | 1330.6 |
| T _a | 25 |

ETC330-FS CC LED COLOR CHANGER

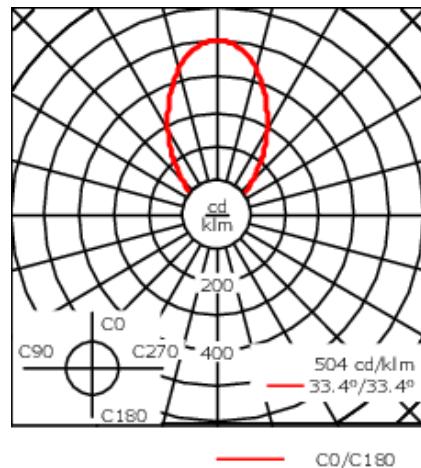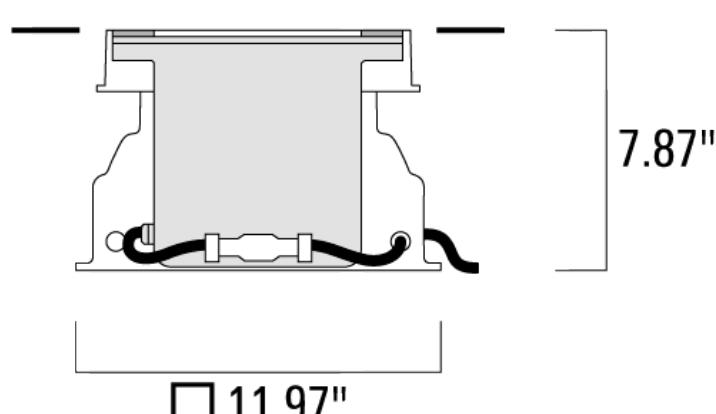

ETC330-FS CC LED COLOR CHANGER

Specifications**Material description**

| | |
|--------------------|---|
| Body | Luminaire body constructed of deep drawn stainless steel. Outer housing composite material. |
| Lens | Safety glass lens, max. load 5 tonnes |
| Colors |  Stainless Steel |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP69K |
| Impact resistance | IK10+ |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter with DMX Interface |
| Termination | Factory sealed termination chamber |


Additional information

| | |
|----------|--|
| Lifetime | LED >60,000 h Ta 25°C (L70/B10) Control gear >50,000 h Ta 25°C |
| Listings | Contact WE-EF USA for ETL certification status. |

ETC330-FS CC LED COLOR CHANGER

Optical Accessories**Linear spread lens**


| Description | Part ID | C1 |
|---------------------------|----------|------|
| Linear spread lens IO-180 | 185-7170 | 7.52 |



ETC330-FS CC LED COLOR CHANGER

Softening Lens

| Description | Part ID | C1 |
|-------------------|----------|------|
| Flood lens I0-360 | 185-7171 | 6.30 |

**Linear louvre**


| Description | Part ID | C1 |
|------------------|----------|------|
| Linear louvre IL | 185-7172 | 7.52 |




ETC330-FS CC LED COLOR CHANGER

Honeycomb louvre

| Description | Part ID | C1 |
|---------------------|----------|------|
| Honeycomb Louvre IW | 185-7180 | 7.53 |

**Wallwash lens**

| Description | Part ID | C1 |
|----------------------------|----------|------|
| IO-20-WW-ETC/EVC_30-FS-LED | 134-1492 | 7.52 |



ETC330-FS CC LED COLOR CHANGER

Control**DMX Wireless Antenna**

| Description | Part ID |
|-----------------|----------|
| Antenna RF1.8dB | 430-0018 |

DMX Wireless Repeater

| Description | Part ID |
|-----------------------|----------|
| DMX Wireless Repeater | 400-0477 |



ETC330-FS CC LED COLOR CHANGER

DMX Wireless Transceiver

| Description | Part ID |
|--------------------------|----------|
| DMX Wireless Transceiver | 400-0476 |

