



### Description


RGBW Colour Changer. IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible PVC free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC\_R\_ One LED Concept. LED circuit board with WE-EF Colour Boost Technology. DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch **<strong><a href="https://vimeo.com/672613058">here.</a></strong>**

Weight	6.40 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-12/19W - RGBW/4K
CRI	20/80
Power supply	EC
LEDs	12
Rated input power	23 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	160
Total Lumen	1920
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	110.6
Total Lumen	1326.7
T <sub>a</sub>	25

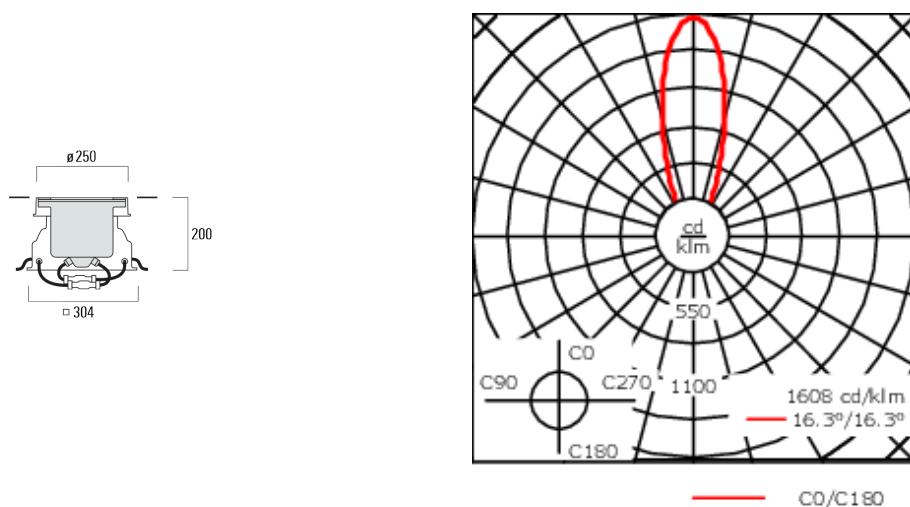

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<span style="background-color: #d3d3d3; display: inline-block; width: 15px; height: 15px;"></span> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+

### Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter with DMX Interface
Termination	Junction box supplied

### Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.
----------	--

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0325	250




C1

## Optical Accessories

### Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7170	191



C1

### Surface wash lens


Description	Part ID	C1
Flood lens IO-360	185-7171	191



C1

**Wallwash lens**

Description	Part ID	C1
IO-20-WW-ETC/EVC_30-FS-LED	185-8492	191



— C1 —

---

## Control

### DMX Wireless Antenna

Description	Part ID
Antenna RF1.8dB	430-0018
Antenna RF5dB	430-0036

### DMX Wireless Repeater

Description	Part ID
DMX Wireless Repeater	400-0477



**DMX Wireless Transceiver**

Description	Part ID
DMX Wireless Transceiver	400-0476

