



### Description



RGBW Colour Changer. IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible PVC free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC\_R\_ One LED Concept. LED circuit board with WE-EF Colour Boost Technology. DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch **<strong><a href="https://vimeo.com/672613058">here.</a></strong>**

Weight	11.00 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-48/30W - RGBW
CRI	20/80
Power supply	EC
LEDs	24
Rated input power	32 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	140
Total Lumen	3360
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	99
Total Lumen	2376.9
T <sub>a</sub>	25

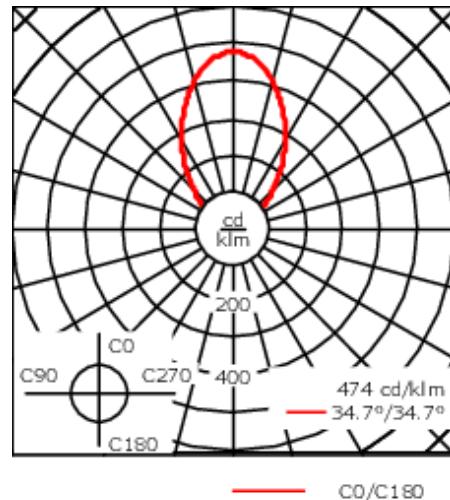

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<span style="background-color: #e0e0e0; display: inline-block; width: 20px; height: 10px; vertical-align: middle;"></span> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK10+

### Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter with DMX Interface
Termination	Junction box supplied


### Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300




C1

## Optical Accessories

### Surface wash lens


Description	Part ID	C1
Flood lens IO-360	185-7579	220



C1

### Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7580	220



C1

**Wallwash lens**

Description	Part ID	C1
Wallwash lens IO-20	185-7589	220



## Control

### DMX Wireless Antenna

Description	Part ID
Antenna RF1.8dB	430-0018
Antenna RF5dB	430-0036

### DMX Wireless Repeater

Description	Part ID
DMX Wireless Repeater	400-0477



**DMX Wireless Transceiver**

Description	Part ID
DMX Wireless Transceiver	400-0476

