



Description

RGBW Colour Changer. IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible PVC free cable.



Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC_R_ One LED Concept. LED circuit board with WE-EF Colour Boost Technology. DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch **here.**

Weight	11.00 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-48/30W - RGBW
CRI	20/80
Power supply	EC
LEDs	24
Rated input power	32 W
Nominal Lumen (lm)	
LED Lumen	140
Total Lumen	3360
T _j	85
Rated lumens (lm)	
LED Lumen	102.7
Total Lumen	2463.8
T _a	25

ETC340-FS CC LED

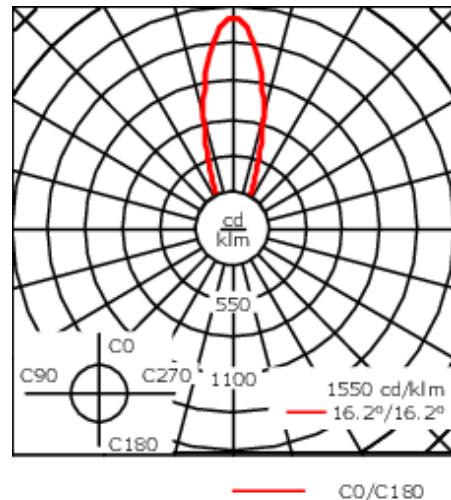**Specifications****Material description**

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK10+

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter with DMX Interface
Termination	Junction box supplied


Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. Warranty void if installed without proper drainage.

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300




C1

Optical Accessories

Surface wash lens


Description	Part ID	C1
Flood lens IO-360	185-7579	220



C1

Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7580	220



C1

Wallwash lens

Description	Part ID	C1
Wallwash lens IO-20	185-7589	220



Control

DMX Wireless Antenna

Description	Part ID
Antenna RF1.8dB	430-0018
Antenna RF5dB	430-0036

DMX Wireless Repeater

Description	Part ID
DMX Wireless Repeater	400-0477



DMX Wireless Transceiver

Description	Part ID
DMX Wireless Transceiver	400-0476

